EXHIBIT 1

DANIEL JOHNSON, JR. (State Bar No. 57409)
RITA E. TAUTKUS (State Bar No. 162090)
BRETT M. SCHUMAN State Bar No. 189247)
AMY M. SPICER (State Bar No. 188399)
MORGAN, LEWIS & BOCKIUS LLP
One Market, Spear Street Tower
San Francisco, CA 94105-1126
Tel: 415.442.1000
Fax: 415.442.1001
djjohnson@morganlewis.com
rtautkus@morganlewis.com
bschuman@morganlewis.com
aspicer@morganlewis.com

ANDREW J. WU (State Bar No. 214442)
MORGAN, LEWIS & BOCKIUS LLP
2 Palo Alto Square
3000 El Camino Real, Suite 700
Palo Alto, CA 94306-2122
Tel: 650.843.4000
Fax: 650.843.4001
awu@morganlewis.com

Attorneys for Plaintiffs and Counterdefendants
ALPHA & OMEGA SEMICONDUCTOR, LTD.
ALPHA & OMEGA SEMICONDUCTOR, INC.

UNITED STATES DISTRICT COURT

NORTHERN DISTRICT OF CALIFORNIA

SAN FRANCISCO DIVISION

ALPHA & OMEGA SEMICONDUCTOR, LTD., a Bermuda corporation; and ALPHA & OMEGA SEMICONDUCTOR, INC., a California corporation,

Plaintiffs and Counterdefendants,

v.

FAIRCHILD SEMICONDUCTOR CORP., a Delaware corporation,

Defendant and Counterclaimant.

AND RELATED COUNTERCLAIMS.

Case No. C 07-2638 JSW
(Consolidated with Case No. C-07-2664 JSW)

PLAINTIFFS' AND COUNTERDEFENDANTS' DISCLOSURE OF ASSERTED CLAIMS AND PRELIMINARY INFRINGEMENT CONTENTIONS PURSUANT TO PATENT L.R. 3-1

Plaintiffs and Counterdefendants Alpha & Omega Semiconductor, Ltd. and Alpha & Omega Semiconductor, Inc. (collectively, "AOS") hereby provide the following disclosures pursuant to Patent Local Rules 3-1 and 3-2.

As an initial matter, AOS notes that under the schedule set by the Court and the parties in this matter, AOS is providing this disclosure prior to receiving documents, interrogatory responses, or any other discovery from Fairchild Semiconductor Corp. ("Fairchild"). Accordingly, AOS reserves the right to supplement these disclosures as it obtains discovery from Fairchild or as otherwise permitted under the applicable rules.

I. Patent Local Rule 3-1 Disclosures

A. Identification of Infringed Claims of the Patents-In-Suit

In this litigation, AOS currently asserts that Defendant and Counterclaimant Fairchild Semiconductor Corp. ("Fairchild") infringes claim 7 of U.S. Patent No. 5,767,567 ("the '567 patent") and claims 1-6, 10, 11, 13, 15, 16, and 25-28 of U.S. Patent No. 5,907,776 ("the '776 patent").

B. Identification of Accused Instrumentalities

1. '567 Patent

Based on the information available to date, the Accused Instrumentalities that infringe the '567 patent include products and methods. Such products include without limitation each of the following Fairchild products, and all other Fairchild products employing a corresponding design: FDS6982S, FDS6675, FDS4435, and FDS8884 (collectively "Accused '567 Patent Products"). Such methods include without limitation the methods that are used to manufacture the Accused '567 Patent Products (collectively "Accused '567 Patent Methods"). AOS reserves the right to supplement and/or amend this identification after receiving discovery from Fairchild, and as permitted under the applicable rules.

2. '776 Patent

Based on the information available to date, the Accused Instrumentalities that infringe the '776 patent include without limitation the methods that are used to manufacture the following Fairchild products, and all other Fairchild products employing a corresponding design:

FDP047AN08A0, FDS4435BZ, FDP3652, and FDS6675BZ (collectively "Accused '776 Patent Products and "Accused '776 Patent Methods"). AOS reserves the right to supplement and/or amend this identification after receiving discovery from Fairchild, and as permitted under the applicable rules.

C. Claim Charts

Charts demonstrating the application of the asserted claims to the Accused Instrumentalities are attached as Exhibits A and B.

D. Identification of Type of Infringement

AOS believes that the Accused '567 Patent Products, Accused '776 Patent Products (collectively, "Accused Fairchild Products") and Accused '576 Patent Methods and Accused '776 Patent Methods (collectively, "Accused Fairchild Methods") identified in the preceding sections literally infringe claim 7 of the '567 patent and each of claims 1-6, 10, 11, 13, 15, 16, and 25-28 of the '776 patent. Even if a judge or jury were to conclude that an element of an asserted claim is not literally present in the Accused Products, or is not literally a step or combination of steps of the Accused Methods, AOS believes that the Accused Fairchild Products and Accused Fairchild Methods would still infringe each of those claims under the doctrine of equivalents because the Accused Fairchild Products and Accused Fairchild Methods would still include, at a minimum, an equivalent to each element of each asserted claim.

E. Identification of Priority Dates

AOS believes, at the present time, that none of the asserted claims of the '567 or '776 patents are entitled to claim priority to an earlier application.

F. AOS Products That Incorporate or Reflect the Claimed Inventions

See Exhibit C for a list of AOS products that practice the claimed inventions.

II. Patent Local Rule 3-2 Document Production

Concurrently with the service of this disclosure, AOS has produced documents pursuant to Patent L.R. 3-2.

Dated: August 31, 2007

MORGAN, LEWIS & BOCKIUS LLP

By: /s/ Daniel Johnson, Jr.
Daniel Johnson, Jr.
Attorneys for Plaintiffs and Counterdefendants ALPHA & OMEGA SEMICONDUCTOR, LTD. AND ALPHA & OMEGA SEMICONDUCTOR, INC.

EXHIBIT A - U.S. Patent No. 5,907,776

Claim 1	Accused '776 Patent Methods
1. A method of forming a semiconductor structure comprising the steps of:	AOS does not express a position at this time as to whether the preamble of this claim limits the claim's scope. Nevertheless, AOS identifies here those aspects of the Accused '776 Patent Methods that correspond to the preamble. The Accused '776 Patent Methods are methods of forming a semiconductor structure.
(a) providing a substrate having a major surface;	The Accused '776 Patent Methods include the step of forming a substrate. The resulting substrate has a top surface.
(b) forming at least one trench in said substrate;	The Accused '776 Patent Methods include the step of forming at least one trench gate in the aforementioned substrate.
(c) forming a body region of a first conductivity type in said substrate,	The Accused '776 Patent Methods include the step of forming a body region in the aforementioned substrate. The resulting body region is of a particular conductivity type.
said body region having a diffusion boundary in said substrate;	The resulting body region also has a diffusion boundary in the aforementioned substrate.
(d) forming a source region of a second conductivity type in said body region; and	The Accused '776 Patent Methods include the step of forming a source region in the aforementioned body region. The resulting source region is of a different conductivity type from the body region.
(e) compensating a portion of said body region by implanting material of said second conductivity type in said body region,	The Accused '776 Patent Methods include the step of compensating a portion of the aforementioned body region. This step includes at least implanting dopants of the same conductivity type as the aforementioned source region.
said portion being proximal to said source region and spaced from said diffusion boundary of said body region and said major so as to reduce the impurity concentration of said first conductivity type in said portion of said body region.	The compensated portion of the body region is near the source region but away from the aforementioned diffusion boundary and the aforementioned top surface of the substrate.

Claim 2	Accused '776 Patent Methods
2. The method of forming a semiconductor structure as set forth in claim 1 further including filling said at least one trench with N-type material.	Those of the Accused '776 Patent Methods used to manufacture Fairchild's N-channel products include the step of filling at least one trench with N-type material.

Claim 3	Accused '776 Patent Methods
3. The method of forming a semiconductor structure set forth in claim 1 wherein step (a) includes providing a base substrate of said second conductivity type and forming an epitaxial layer of said second conductivity type above said base substrate.	In the Accused '776 Patent Methods, the aforementioned step of forming a substrate includes the steps of (1) providing a base substrate of the same conductivity type as the aforementioned source region and (2) forming an epitaxial layer of the same conductivity type as the source region above the base substrate.

Claim 4	Accused '776 Patent Methods
4. The method of forming a semiconductor structure as set forth in claim 1 wherein step (c) includes the substeps of ion implanting material of said body region in said substrate and thereafter diffusing said material of said body region in said substrate.	In the Accused '776 Patent Methods, the aforementioned step of forming a body region includes the steps of ion implanting dopants and subsequently diffusing the dopants in the aforementioned substrate.

Claim 5	Accused '776 Patent Methods
5. The method of forming a semiconductor structure as set forth in claim 1 wherein step (d) includes the substeps of ion implanting material of said source region in said substrate and thereafter diffusing said material of said source region in said body region.	In the Accused '776 Patent Methods, the aforementioned step of forming a source region includes the steps of ion implanting dopants and subsequently diffusing the dopants in the aforementioned body region.

Claim 6	Accused '776 Patent Methods
6. The method of forming a semiconductor structure as set forth in claim 5 wherein step (e) includes ion implanting material of said second conductivity type in said body region at a predetermined distance from said source region.	In the Accused '776 Patent Methods, the aforementioned step of compensating a portion of the body region includes the step of ion implanting dopants of the same conductivity type as the aforementioned source region at a distance away from the source region.

Claim 10	Accused '776 Patent Methods
10. The method of forming a semiconductor structure as set forth in claim 1 further comprising forming a gate region formed of material of N-type conductivity dielectrically separated from said body region.	Those of the Accused '776 Patent Methods used to manufacture Fairchild's N-channel products further include the step of forming a gate region of N-type material. The resulting gate region is dielectrically separated from the aforementioned body region.

Claim 11	Accused '776 Patent Methods
11. The method of forming a semiconductor structure as set forth in claim 1 wherein said first conductivity type is of N-type and said second conductivity is of P-type.	In the Accused '776 Patent Methods used to manufacture Fairchild's N-channel products, the first conductivity type, which is the conductivity type of the resulting body region, is of N-type conductivity; the second conductivity type, which is the conductivity type of the resulting source region, is of P-type conductivity.

Claim 13	Accused '776 Patent Methods
13. A method of forming a semiconductor structure having a trench gate with a gate threshold voltage, said method comprising the steps of:	AOS does not express a position at this time as to whether the preamble of this claim limits the claim's scope. Nevertheless, AOS identifies here those aspects of the Accused '776 Patent Methods that correspond to the preamble. The Accused '776 Patent Methods are methods of forming a semiconductor structure.
(a) providing a substrate having a major surface;	The Accused '776 Patent Methods include the step of forming a substrate. The resulting substrate has a top surface.
(b) forming a body region of a first conductivity type in said substrate,	The Accused '776 Patent Methods include the step of forming a body region in the aforementioned substrate. The resulting body region is of a particular conductivity type.
said body region having a diffusion boundary in said substrate;	The resulting body region also has a diffusion boundary in the aforementioned substrate.
(c) forming a source region of a second conductivity type in said body region; and	The Accused '776 Patent Methods include the step of forming a source region in the aforementioned body region. The resulting source region is of a different conductivity type from the body region.
(d) compensating a portion of said body region by implanting material of said second conductivity type in said body region	The Accused '776 Patent Methods include the step of compensating a portion of the aforementioned body region. This step includes at least implanting dopants of the same conductivity type as the aforementioned source region.
adjacent to said source region and spaced from said diffusion boundary of said body region and	The compensated portion of the body region is near the source region but away from the aforementioned diffusion boundary and the aforementioned top surface of the substrate.

said major surface such that the impurity concentration of said portion of said body region is substantially reduced so as to decrease the gate threshold voltage of said trench gate.	

Claim 15	Accused '776 Patent Methods
15. The method of forming a semiconductor structure as set forth in claim 13 wherein step (d) includes ion implanting material of said second conductivity type in said body region at a predetermined distance from said source region.	In the Accused '776 Patent Methods, the aforementioned step of compensating a portion of the body region includes the step of ion implanting dopants of the same conductivity type as the aforementioned source region at a distance away from the source region.

Claim 16	Accused '776 Patent Methods
16. The method for forming a semiconductor structure as set forth in claim 15 wherein step (d) further including diffusing said compensated portion of said body region in said body region.	In the Accused '776 Patent Methods, the aforementioned step of compensating a portion of the body region includes the step of diffusing the compensated portion of the body region.

Claim 25	Accused '776 Patent Methods
25. A method of forming a semiconductor structure having a gate with a gate threshold voltage, said method comprising the steps of:	AOS does not express a position at this time as to whether the preamble of this claim limits the claim's scope. Nevertheless, AOS identifies here those aspects of the Accused '776 Patent Methods that correspond to the preamble. The Accused '776 Patent Methods are methods of forming a semiconductor structure.
(a) providing a substrate having a major surface;	The Accused '776 Patent Methods include the step of forming a substrate. The resulting substrate has a top surface.
(b) forming at least one trench in said substrate extending from said major surface;	The Accused '776 Patent Methods include the step of forming at least one trench in the aforementioned substrate. The resulting trench extends from the top surface of the aforementioned substrate.
(c) forming a body region of a first conductivity type in said substrate	The Accused '776 Patent Methods include the step of forming a body region in the aforementioned substrate. The resulting body region is of a particular conductivity type.
to a diffusion boundary extending from said major surface;	The resulting body region also has a diffusion boundary to which it extends in the substrate from the aforementioned top surface of the substrate.
(d) forming a source region of a	The Accused '776 Patent Methods include the step of forming a

second conductivity type in said body layer extending from said major surface; and	source region in the aforementioned body region. The resulting source region is of a different conductivity type from the body region. The resulting source region also extends from the aforementioned top surface of the substrate.
(e) compensating a portion of said body region by implanting material of said second conductivity type in said body region	The Accused '776 Patent Methods include the step of compensating a portion of the aforementioned body region. This step includes at least implanting dopants of the same conductivity type as the aforementioned source region.
adjacent to said source region and spaced from said diffusion boundary of said body layer and said major surface such that the conductivity of said portion of said body region is substantially reduced so as to decrease the gate threshold voltage of said gate.	The compensated portion of the body region is near the source region but away from the aforementioned diffusion boundary and the aforementioned top surface of the substrate.

Claim 26	Accused '776 Patent Methods
26. The method of forming a semiconductor structure as set forth in claim 25 wherein step (b) includes the substep of lining said trenches with insulating material and followed by another substep of filing said trenches with conductive material.	In the Accused '776 Patent Methods, the aforementioned step of forming at least one trench includes the steps of lining the at least one trench with insulating material and subsequently filling the at least one trench with conductive material.

Claim 27	Accused '776 Patent Methods
27. The method of forming a semiconductor structure as set forth in claim 26 wherein said conductive material is a N-type material.	In the Accused '776 Patent Methods used to manufacture Fairchild's N-channel products, the aforementioned conductive material with which the at least one trench is filled is an N-type material.

Claim 28	Accused '776 Patent Methods
28. The method of forming a semiconductor structure as set forth in claim 25 wherein step (e) includes ion implanting material of said second conductivity type in said body region at a predetermined distance from said source region.	In the Accused '776 Patent Methods, the aforementioned step of compensating a portion of the body region includes the step of ion implanting dopants of the same conductivity type as the aforementioned source region at a distance away from the source region.

EXHIBIT B - U.S. Patent No. 5,767,567

Claim 7	Accused '567 Patent Methods
7. A method to configure a source contact area on a power MOSFET device by dividing said source contact areas with several gate runners disposed thereon, said method including steps of:	AOS does not express a position at this time as to whether the preamble of this claim limits the claim's scope. Nevertheless, AOS identifies here those aspects of the Accused '567 Patent Methods that correspond to the preamble. The Accused '567 Patent Methods are used to configure at least one source contact area on a power MOSFET integrated circuit ("IC") device. The Accused '567 Patent Methods include dividing the at least one source contact area with one or more gate runners.
(a) determining a total number of lead wires for connecting to a lead frame from said source contact area on said MOSFET power device; and	The Accused '567 Patent Methods include the step of determining a total number of lead wires for connecting to the at least one lead frame from a given source contact area.
(b) configuring said gate runners for dividing said source contact area into several sub-contact areas with a set of area proportional ratios for disposing several of said lead wires in each of said sub-contact areas according to said set of area proportional ratios.	The Accused '567 Patent Methods include the step of dividing the source contact area with the one or more gate runners into two or more subsections. The subsections of the source contact area are divided so that they are of proportional ratios for disposing the lead wires in accordance with the ratios.

EXHIBIT C

AOS Products Practicing the Claimed Inventions (by Part Number)

AO4407
AO4407
AO4407L
AO4409
AO4409-BD
AO4409L
AO4410-BD
AO4410-BD
AO4411-BD
AO4411-BD
AO4411-BD
AO4411L-BD
AO4413-BD
AO4413-BD
AO4413L-BD
AO4413L-BD
AO4415-BD
AO4415-BD
AO4415-BD
AO4415L-BD
AO4417-BD
AO4417-BD
AO4417-BD
AO4418A_100-BD
AO4418-BD
AO4418-BD
AO4418-BD
AO4418L-BD
AO4421-BD
AO4421L-BD
AO4422A-BD
AO4422A-BD
AO4422A-BD
AO4422AL
AO4422-BD
AO4422-BD
AO4422-BD
AO4422-BD
AO4422L-BD
AO4423-BD
AO4423L-BD
AO4428-BD
AO4428-BD
AO4429-BD
AO4429-BD
AO4429L-BD
AO4430
AO4430A_100-BD
AO4430-BD
AO4430-BD
AO4430-BD
AO4430-BD
AO4430L-BD
AO4431-BD
AO4431-BD
AO4431-BD
AO4436-BD
AO4438-BD
AO4438-BD
AO4438L-BD
AO4439-BD
AO4439-BD
AO4439-BD
AO4439L-BD
AO4446-BD
AO4446-BD
AO4446-BD
AO4447-BD
AO4449_100-BD
AO4449-BD
AO44451_100-BD
AO44451-BD
AO4556_100-BD
AO4456-BD
AO4462_100-BD
AO4462-BD
AO4468-BD
AO4468_100-BD
AO4468-BD
AO4470_100-BD
AO4470-BD
AO4472_100-BD
AO4472-BD
AO4474_100-BD
AO4474-BD
AO4476_100-BD
AO4476-BD
AO4702-BD
AO4702-BD
AO4702L-BD
AO4703-BD
AO4705-BD
AO4706_100-BD
AO4706-BD
AO4707-BD
AO4708_100-BD
AO4708-BD
AO4709-BD
AO4709-BD
AO4709-BD
AO4716_100-BD
AO4716-BD
AO4718_100-BD
AO4718-BD
AO4726_100-BD
AO4818B_100-BD
AO4818B-BD
AO4818-BD
AO4818-BD
AO4818L-BD
AO4822_100-BD
AO4822A-BD
AO4822A-BD
AO4822AL-BD
AO4822-BD
AO4822L-BD
AO4824L-BD
AO4912-BD
AO4912L-BD
AO4916A-BD
AO4916-BD
AO4916L-BD
AO4918A-BD
AO4918AL-BD
AO4918-BD
AO4918L-BD
AO4930_100-BD
AO4930-BD
AO4932_100-BD
AO4932-BD
AO4938_100-BD
AO4938-BD
AOD402-BD
AOD402L-BD
AOU405L-BD

CERTIFICATE OF SERVICE

I am employed in the City of Palo Alto, County of Santa Clara, State of California, I am over the age of 18 years and not a party to the within action. My business address is 2 Palo Alto Square, 3000 El Camino Real, Palo Alto, California 94306. On August 31, 2007, I caused copies of the attached document(s) described as follows:

PLAINTIFFS' AND COUNTERDEFENDANTS' DISCLOSURE OF ASSERTED CLAIMS AND PRELIMINARY INFRINGEMENT CONTENTIONS PURSUANT TO PATENT L.R. 3-1

to be served on:

Eric P. Jacobs, Esq.
TOWNSEND & TOWNSEND
2 Embarcadero Center, 8th Floor
San Francisco, CA 94111
Tel: 415.576.0200
Fax: 415.576.0300

_____(BY OVERNIGHT DELIVERY) I caused each such envelope to the addressee(s) noted above, with charges fully prepaid, to be sent by overnight delivery from Palo Alto, California. I am readily familiar with the practice of Morgan, Lewis & Bockius LLP for collection and processing of correspondence for overnight delivery, said practice being that in the ordinary course of business, mail is placed with the overnight delivery service on the same day as it is placed for collection.

__BY ELECTRONIC MAIL) The person whose name is noted below caused to be transmitted by electronic mail each such document to the addressee(s) noted above.

_X_(BY FIRST CLASS MAIL) I caused each such envelope to the addressee(s) noted above, with postage thereon fully prepaid, to be placed in the United States mail in Palo Alto, California. I am readily familiar with the practice of Morgan, Lewis & Bockius LLP for collection and processing of correspondence for mailing, said practice being that in the ordinary course of business mail is deposited in the United States Postal Service the same date as it is placed for collection; and

_____(BY FACSIMILE) The person whose name is noted below caused to be transmitted by facsimile each such document to the addressee(s) noted above; and

__(BY PERSONAL SERVICE) The person whose name is noted below caused to be delivered by hand each such envelope to the addressee(s) noted above.

I declare under penalty of perjury under the laws of the State of California that the foregoing is true and correct. Executed at Palo Alto, California, on August 31, 2007.

/s/
Ahren Hoffman

EXHIBIT 2

MORGAN, LEWIS & BOCKIUS LLP
Daniel Johnson, Jr. (State Bar No. 57409)
Brett M. Schuman (State Bar No. 189247)
Amy M. Spicer (State Bar No. 188399)
One Market, Spear Street Tower
San Francisco, CA 94105-1126
Tel: 415.442.1000
Fax: 415.442.1001
djjohnson@morganlewis.com
bschuman@morganlewis.com
aspicer@morganlewis.com

MORGAN, LEWIS & BOCKIUS LLP
Andrew J. Wu (State Bar No. 214442)
Ahren C. Hoffman (State Bar No. 250469)
2 Palo Alto Square
3000 El Camino Real, Suite 700
Palo Alto, CA 94306-2122
Tel: 650.843.4000
Fax: 650.843.4001
awu@morganlewis.com
ahoffman@morganlewis.com

Attorneys for Plaintiffs and Counterdefendants
ALPHA & OMEGA SEMICONDUCTOR, LTD.
ALPHA & OMEGA SEMICONDUCTOR, INC.

UNITED STATES DISTRICT COURT

NORTHERN DISTRICT OF CALIFORNIA

SAN FRANCISCO DIVISION

ALPHA & OMEGA SEMICONDUCTOR, LTD., a Bermuda corporation; and ALPHA & OMEGA SEMICONDUCTOR, INC., a California corporation,

Plaintiffs and Counterdefendants,

v.

FAIRCHILD SEMICONDUCTOR CORP., a Delaware corporation,

Defendant and Counterclaimant.

AND RELATED COUNTERCLAIMS.

Case No. C 07-2638 JSW
(Consolidated with Case No. C-07-2664 JSW)

PLAINTIFFS' AND COUNTERDEFENDANTS' SUPPLEMENTAL DISCLOSURE OF ASSERTED CLAIMS AND PRELIMINARY INFRINGEMENT CONTENTIONS PURSUANT TO PATENT L.R. 3-1

Plaintiffs and Counterdefendants Alpha & Omega Semiconductor, Ltd. and Alpha & Omega Semiconductor, Inc. (collectively, "AOS") hereby provide the following supplemental disclosures for U.S. Patent Nos. 5,767,567 ("the '567 patent") and 5,907,776 ("the '776 patent") pursuant to Patent Local Rules 3-1 and 3-2.

As an initial matter, AOS notes that under the schedule set by the Court and the parties in this matter, AOS is providing this disclosure while discovery from Defendant and Counterclaimant Fairchild Semiconductor Corp. ("Fairchild") is still in its early stages. Accordingly, AOS reserves the right to supplement these disclosures as it obtains further discovery from Fairchild or as otherwise permitted by the Court or the applicable rules.

I. Patent Local Rule 3-1 Disclosures

A. Identification of Infringed Claims of the Patents-In-Suit

In this litigation, AOS asserts that Fairchild infringes claim 7 of the '567 patent and claims 1-6, 10, 11, 13, 15, 16, and 25-28 of the '776 patent. AOS further asserts that Fairchild infringes U.S. Patent No. 5,930,630 ("the '630 patent"). These disclosures concern the '567 and '776 patents only. AOS will serve disclosures for the '630 patent in accordance with the timeline set by the Court or the applicable rules.

B. Identification of Accused Instrumentalities

1. '567 Patent

Based on the information available to date, the Accused Instrumentalities that infringe the '567 patent include without limitation the methods that are used to manufacture the following Fairchild products, and all other Fairchild products employing a corresponding design: FDS6982S, FDS6675, FDS4435, and FDS8884 (collectively, "Accused '567 Patent Products" and "Accused '567 Patent Methods"). AOS reserves the right to supplement and/or amend this identification after receiving discovery from Fairchild, and as permitted under the applicable rules.

2. '776 Patent

Based on the information available to date, the Accused Instrumentalities that infringe the '776 patent include without limitation the methods that are used to manufacture the following

Fairchild products, and all other Fairchild products employing a corresponding design: FDP047AN08A0, FDS4435BZ, FDP3652, and FDS6675BZ (collectively, "Accused '776 Patent Products" and "Accused '776 Patent Methods"). AOS reserves the right to supplement and/or amend this identification after receiving discovery from Fairchild, and as permitted under the applicable rules.

C. Claim Charts

Charts demonstrating the application of the asserted claims to the Accused Instrumentalities are attached as Exhibits A and B.

D. Identification of Type of Infringement

AOS believes that the Accused '567 Patent Products and Accused '776 Patent Products (collectively, "Accused Fairchild Products"), and the Accused '576 Patent Methods and Accused '776 Patent Methods (collectively, "Accused Fairchild Methods"), identified in the preceding sections literally infringe claim 7 of the '567 patent and each of claims 1-6, 10, 11, 13, 15, 16, and 25-28 of the '776 patent. Even if a judge or jury were to conclude that an element of an asserted claim is not literally present in the Accused Products, or is not literally a step or combination of steps of the Accused Methods, AOS believes that the Accused Fairchild Products and Accused Fairchild Methods would still infringe each of those claims under the doctrine of equivalents because the Accused Fairchild Products and Accused Fairchild Methods would still include, at a minimum, an equivalent to each element of each asserted claim.

E. Identification of Priority Dates

AOS believes, at the present time, that none of the asserted claims of the '567 or '776 patents are entitled to claim priority to an earlier application.

F. AOS Products That Incorporate or Reflect the Claimed Inventions

See Exhibit C for a list of AOS products that practice claim 7 of the '567 patent.

II. Patent Local Rule 3-2 Document Production

AOS has previously produced documents pursuant to Patent L.R. 3-2.

Dated: October 19, 2007

MORGAN, LEWIS & BOCKIUS LLP

By: _____
Andrew J. Wu
Attorneys for Plaintiffs and Counterdefendants
ALPHA & OMEGA SEMICONDUCTOR, LTD. AND ALPHA & OMEGA SEMICONDUCTOR, INC.

CERTIFICATE OF SERVICE

I am employed in the City of Palo Alto, County of Santa Clara, State of California, I am over the age of 18 years and not a party to the within action. My business address is 2 Palo Alto Square, 3000 El Camino Real, Palo Alto, California 94306. On October 19, 2007, I caused copies of the attached document(s) described as follows:

PLAINTIFFS' AND COUNTERDEFENDANTS' SUPPLEMENTAL DISCLOSURE OF ASSERTED CLAIMS AND PRELIMINARY INFRINGEMENT CONTENTIONS PURSUANT TO PATENT L.R. 3-1

to be served on:

Eric P. Jacobs, Esq.
TOWNSEND & TOWNSEND
2 Embarcadero Center, 8th Floor
San Francisco, CA 94111
Tel: 415.576.0200
Fax: 415.576.0300

_____(BY OVERNIGHT DELIVERY) I caused each such envelope to the addressee(s) noted above, with charges fully prepaid, to be sent by overnight delivery from Palo Alto, California. I am readily familiar with the practice of Morgan, Lewis & Bockius LLP for collection and processing of correspondence for overnight delivery, said practice being that in the ordinary course of business, mail is placed with the overnight delivery service on the same day as it is placed for collection.

__BY ELECTRONIC MAIL) The person whose name is noted below caused to be transmitted by electronic mail each such document to the addressee(s) noted above.

_X_(BY FIRST CLASS MAIL) I caused each such envelope to the addressee(s) noted above, with postage thereon fully prepaid, to be placed in the United States mail in Palo Alto, California. I am readily familiar with the practice of Morgan, Lewis & Bockius LLP for collection and processing of correspondence for mailing, said practice being that in the ordinary course of business mail is deposited in the United States Postal Service the same date as it is placed for collection; and

_____(BY FACSIMILE) The person whose name is noted below caused to be transmitted by facsimile each such document to the addressee(s) noted above; and

__(BY PERSONAL SERVICE) The person whose name is noted below caused to be delivered by hand each such envelope to the addressee(s) noted above.

I declare under penalty of perjury under the laws of the State of California that the foregoing is true and correct. Executed at Palo Alto, California, on October 19, 2007.

Denise Judilla

EXHIBIT A - U.S. Patent No. 5,907,776

Claim 1	Accused '776 Patent Methods
1. A method of forming a semiconductor structure comprising the steps of:	AOS does not express a position at this time as to whether the preamble of this claim limits the claim's scope. Nevertheless, AOS identifies here those aspects of the Accused '776 Patent Methods that correspond to the preamble. The Accused '776 Patent Methods are methods of forming a semiconductor structure. *See, e.g.*, Scanning Electron Microscope Image of FDP047AN08A0 ("FDP047AN08AO SEM") (showing a semiconductor structure): 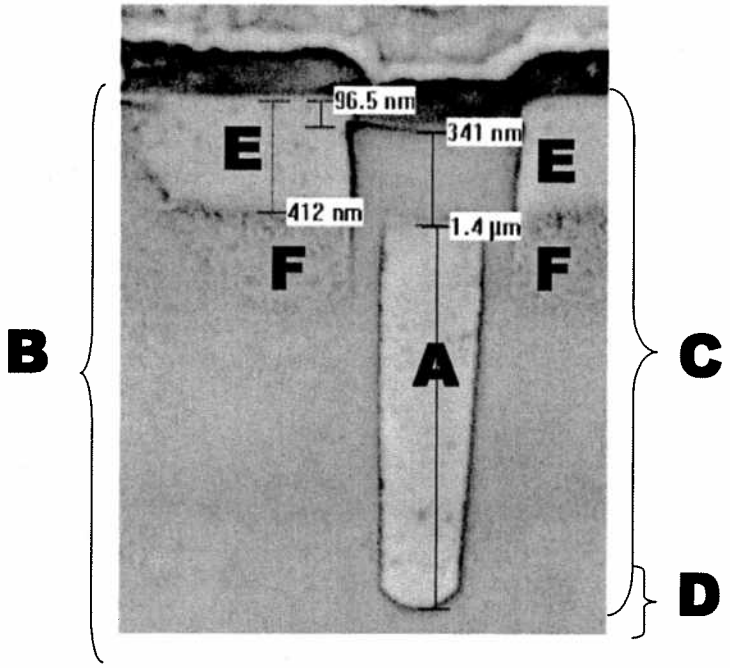
(a) providing a substrate having a major surface;	The Accused '776 Patent Methods include the step of forming a substrate. The resulting substrate has a top surface. *See, e.g.*, FDP047AN08AO SEM (showing a substrate "B" with a top surface).
(b) forming at least one trench in said substrate;	The Accused '776 Patent Methods include the step of forming at least one trench gate in the aforementioned substrate. *See, e.g.*, FDP047AN08AO SEM (showing a trench gate "A" in substrate "B").
(c) forming a body region of a first conductivity type in said substrate,	The Accused '776 Patent Methods include the step of forming a body region in the aforementioned substrate. The resulting body region is of a particular conductivity type. *See, e.g.*, FDP047AN08AO SEM (showing a body region "C").

said body region having a diffusion boundary in said substrate;	The resulting body region also has a diffusion boundary in the aforementioned substrate. *See, e.g.*, FDP047AN08AO SEM (showing a body region "C" with a diffusion boundary "D").
(d) forming a source region of a second conductivity type in said body region; and	The Accused '776 Patent Methods include the step of forming a source region in the aforementioned body region. The resulting source region is of a different conductivity type from the body region. *See, e.g.*, FDP047AN08AO SEM (showing a source region "E" in the body region "C").
(e) compensating a portion of said body region by implanting material of said second conductivity type in said body region,	The Accused '776 Patent Methods include the step of compensating a portion of the aforementioned body region. This step includes at least implanting dopants of the same conductivity type as the aforementioned source region. *See, e.g.*, FDP047AN08AO SEM (showing a compensated body region "F").
said portion being proximal to said source region and spaced from said diffusion boundary of said body region and said major so as to reduce the impurity concentration of said first conductivity type in said portion of said body region.	The compensated portion of the body region is near the source region but away from the aforementioned diffusion boundary and the aforementioned top surface of the substrate. *See, e.g.*, FDP047AN08AO SEM (showing the compensated body region "F" proximal to the source region "E" and spaced from the diffusion boundary "D").

Claim 2	Accused '776 Patent Methods
2. The method of forming a semiconductor structure as set forth in claim 1 further including filling said at least one trench with N-type material.	Those of the Accused '776 Patent Methods used to manufacture Fairchild's N-channel products include the step of filling at least one trench with N-type material.

Claim 3	Accused '776 Patent Methods
3. The method of forming a semiconductor structure set forth in claim 1 wherein step (a) includes providing a base substrate of said second conductivity type and forming an epitaxial layer of said second conductivity type above said base substrate.	In the Accused '776 Patent Methods, the aforementioned step of forming a substrate includes the steps of (1) providing a base substrate of the same conductivity type as the aforementioned source region and (2) forming an epitaxial layer of the same conductivity type as the source region above the base substrate. *See, e.g.*, FDP047AN08AO SEM (showing a substrate "B" with a top surface).

Claim 4	Accused '776 Patent Methods
4. The method of forming a semiconductor structure as set forth in claim 1 wherein step (c) includes the substeps of ion implanting material of said body	In the Accused '776 Patent Methods, the aforementioned step of forming a body region includes the steps of ion implanting dopants and subsequently diffusing the dopants in the aforementioned substrate. *See, e.g.*, FDP047AN08AO SEM (showing a body region "C").

region in said substrate and thereafter diffusing said material of said body region in said substrate.	

Claim 5	Accused '776 Patent Methods
5. The method of forming a semiconductor structure as set forth in claim 1 wherein step (d) includes the substeps of ion implanting material of said source region in said substrate and thereafter diffusing said material of said source region in said body region.	In the Accused '776 Patent Methods, the aforementioned step of forming a source region includes the steps of ion implanting dopants and subsequently diffusing the dopants in the aforementioned body region. *See, e.g.*, FDP047AN08AO SEM (showing a source region "E" in the body region "C").

Claim 6	Accused '776 Patent Methods
6. The method of forming a semiconductor structure as set forth in claim 5 wherein step (e) includes ion implanting material of said second conductivity type in said body region at a predetermined distance from said source region.	In the Accused '776 Patent Methods, the aforementioned step of compensating a portion of the body region includes the step of ion implanting dopants of the same conductivity type as the aforementioned source region at a distance away from the source region. *See, e.g.*, FDP047AN08AO SEM (showing a compensated body region "F").

Claim 10	Accused '776 Patent Methods
10. The method of forming a semiconductor structure as set forth in claim 1 further comprising forming a gate region formed of material of N-type conductivity dielectrically separated from said body region.	Those of the Accused '776 Patent Methods used to manufacture Fairchild's N-channel products further include the step of forming a gate region of N-type material. The resulting gate region is dielectrically separated from the aforementioned body region. *See, e.g.*, FDP047AN08AO SEM (showing a trench gate "A" insulated from the body region "C" and substrate "B").

Claim 11	Accused '776 Patent Methods
11. The method of forming a semiconductor structure as set forth in claim 1 wherein said first conductivity type is of N-type and said second conductivity is of P-type.	In the Accused '776 Patent Methods used to manufacture Fairchild's N-channel products, the first conductivity type, which is the conductivity type of the resulting body region, is of N-type conductivity; the second conductivity type, which is the conductivity type of the resulting source region, is of P-type conductivity.

Claim 13	Accused '776 Patent Methods
13. A method of forming a semiconductor structure having a trench gate with a gate threshold voltage, said method comprising the steps of:	AOS does not express a position at this time as to whether the preamble of this claim limits the claim's scope. Nevertheless, AOS identifies here those aspects of the Accused '776 Patent Methods that correspond to the preamble.

	The Accused '776 Patent Methods are methods of forming a semiconductor structure. *See, e.g.*, FDP047AN08AO SEM (showing a semiconductor structure).
(a) providing a substrate having a major surface;	The Accused '776 Patent Methods include the step of forming a substrate. The resulting substrate has a top surface. *See, e.g.*, FDP047AN08AO SEM (showing a substrate "B" with a top surface).
(b) forming a body region of a first conductivity type in said substrate,	The Accused '776 Patent Methods include the step of forming a body region in the aforementioned substrate. The resulting body region is of a particular conductivity type. *See, e.g.*, FDP047AN08AO SEM (showing a body region "C").
said body region having a diffusion boundary in said substrate;	The resulting body region also has a diffusion boundary in the aforementioned substrate. *See, e.g.*, FDP047AN08AO SEM (showing a body region "C" with a diffusion boundary "D").
(c) forming a source region of a second conductivity type in said body region; and	The Accused '776 Patent Methods include the step of forming a source region in the aforementioned body region. The resulting source region is of a different conductivity type from the body region. *See, e.g.*, FDP047AN08AO SEM (showing a source region "E" in the body region "C").
(d) compensating a portion of said body region by implanting material of said second conductivity type in said body region	The Accused '776 Patent Methods include the step of compensating a portion of the aforementioned body region. This step includes at least implanting dopants of the same conductivity type as the aforementioned source region. *See, e.g.*, FDP047AN08AO SEM (showing a compensated body region "F").
adjacent to said source region and spaced from said diffusion boundary of said body region and said major surface such that the impurity concentration of said portion of said body region is substantially reduced so as to decrease the gate threshold voltage of said trench gate.	The compensated portion of the body region is near the source region but away from the aforementioned diffusion boundary and the aforementioned top surface of the substrate. *See, e.g.*, FDP047AN08AO SEM (showing the compensated body region "F" adjacent to the source region "E" and spaced from the diffusion boundary "D").

Claim 15	Accused '776 Patent Methods
15. The method of forming a semiconductor structure as set forth in claim 13 wherein step (d) includes ion implanting material of said second conductivity type in said body region at a predetermined distance from said source region.	In the Accused '776 Patent Methods, the aforementioned step of compensating a portion of the body region includes the step of ion implanting dopants of the same conductivity type as the aforementioned source region at a distance away from the source region. *See, e.g.*, FDP047AN08AO SEM (showing a compensated body region "F").

Claim 16	Accused '776 Patent Methods
16. The method for forming a semiconductor structure as set forth in claim 15 wherein step (d) further including diffusing said compensated portion of said body region in said body region.	In the Accused '776 Patent Methods, the aforementioned step of compensating a portion of the body region includes the step of diffusing the compensated portion of the body region. *See, e.g.*, FDP047AN08AO SEM (showing a compensated body region "F").

Claim 25	Accused '776 Patent Methods
25. A method of forming a semiconductor structure having a gate with a gate threshold voltage, said method comprising the steps of:	AOS does not express a position at this time as to whether the preamble of this claim limits the claim's scope. Nevertheless, AOS identifies here those aspects of the Accused '776 Patent Methods that correspond to the preamble. The Accused '776 Patent Methods are methods of forming a semiconductor structure. *See, e.g.*, FDP047AN08AO SEM (showing a semiconductor structure).
(a) providing a substrate having a major surface;	The Accused '776 Patent Methods include the step of forming a substrate. The resulting substrate has a top surface. *See, e.g.*, FDP047AN08AO SEM (showing a substrate "B" with a top surface).
(b) forming at least one trench in said substrate extending from said major surface;	The Accused '776 Patent Methods include the step of forming at least one trench in the aforementioned substrate. The resulting trench extends from the top surface of the aforementioned substrate. *See, e.g.*, FDP047AN08AO SEM (showing a trench gate "A" in substrate "B").
(c) forming a body region of a first conductivity type in said substrate	The Accused '776 Patent Methods include the step of forming a body region in the aforementioned substrate. The resulting body region is of a particular conductivity type. *See, e.g.*, FDP047AN08AO SEM (showing a body region "C").
to a diffusion boundary extending from said major surface;	The resulting body region also has a diffusion boundary to which it extends in the substrate from the aforementioned top surface of the substrate. *See, e.g.*, FDP047AN08AO SEM (showing a body region "C" with a diffusion boundary "D").
(d) forming a source region of a second conductivity type in said body layer extending from said major surface; and	The Accused '776 Patent Methods include the step of forming a source region in the aforementioned body region. The resulting source region is of a different conductivity type from the body region. The resulting source region also extends from the aforementioned top surface of the substrate. *See, e.g.*, FDP047AN08AO SEM (showing a source region "E" in the body region "C").
(e) compensating a portion of said body region by implanting material of said second	The Accused '776 Patent Methods include the step of compensating a portion of the aforementioned body region. This step includes at least implanting dopants of the same conductivity type as the

conductivity type in said body region	aforementioned source region. *See, e.g.*, FDP047AN08AO SEM (showing a compensated body region "F").
adjacent to said source region and spaced from said diffusion boundary of said body layer and said major surface such that the conductivity of said portion of said body region is substantially reduced so as to decrease the gate threshold voltage of said gate.	The compensated portion of the body region is near the source region but away from the aforementioned diffusion boundary and the aforementioned top surface of the substrate. *See, e.g.*, FDP047AN08AO SEM (showing the compensated body region "F" adjacent to the source region "E" and spaced from the diffusion boundary "D"),

Claim 26	Accused '776 Patent Methods
26. The method of forming a semiconductor structure as set forth in claim 25 wherein step (b) includes the substep of lining said trenches with insulating material and followed by another substep of filing said trenches with conductive material.	In the Accused '776 Patent Methods, the aforementioned step of forming at least one trench includes the steps of lining the at least one trench with insulating material and subsequently filling the at least one trench with conductive material. *See, e.g.*, FDP047AN08AO SEM (showing a trench gate "A" in substrate "B").

Claim 27	Accused '776 Patent Methods
27. The method of forming a semiconductor structure as set forth in claim 26 wherein said conductive material is a N-type material.	In the Accused '776 Patent Methods used to manufacture Fairchild's N-channel products, the aforementioned conductive material with which the at least one trench is filled is an N-type material.

Claim 28	Accused '776 Patent Methods
28. The method of forming a semiconductor structure as set forth in claim 25 wherein step (e) includes ion implanting material of said second conductivity type in said body region at a predetermined distance from said source region.	In the Accused '776 Patent Methods, the aforementioned step of compensating a portion of the body region includes the step of ion implanting dopants of the same conductivity type as the aforementioned source region at a distance away from the source region. *See, e.g.*, FDP047AN08AO SEM (showing a compensated body region "F").

EXHIBIT B - U.S. Patent No. 5,767,567

Claim 7	Accused '567 Patent Methods
7. A method to configure a source contact area on a power MOSFET device by dividing said source contact areas with several gate runners disposed thereon, said method including steps of:	AOS does not express a position at this time as to whether the preamble of this claim limits the claim's scope. Nevertheless, AOS identifies here those aspects of the Accused '567 Patent Methods that correspond to the preamble. The Accused '567 Patent Methods are used to configure at least one source contact area on a power MOSFET integrated circuit ("IC") device. The Accused '567 Patent Methods include dividing the at least one source contact area with one or more gate runners. *See, e.g.*, FAIR0008500 (see below diagram, disclosing that FDS6675 has a source contact area "K" divided by several gate runners "L"). 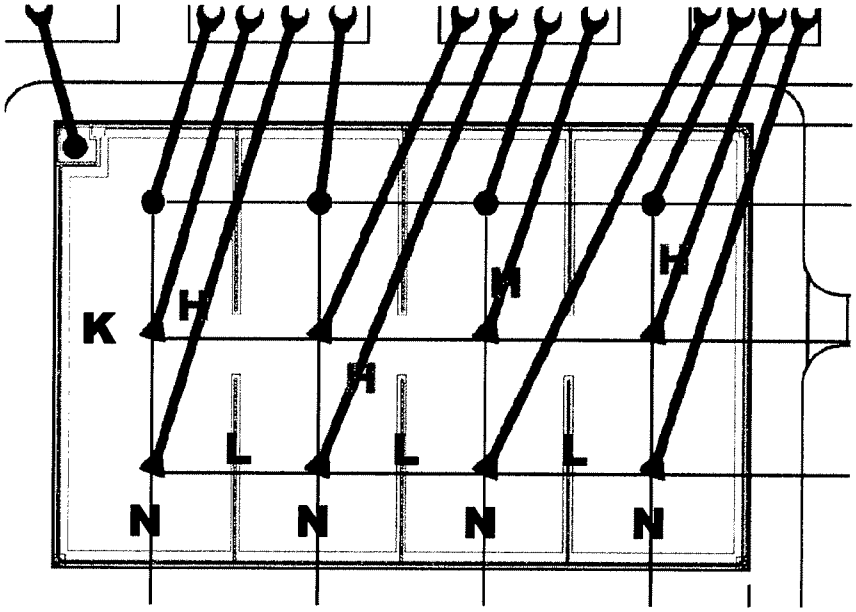 Source: FAIR0008500.
(a) determining a total number of lead wires for connecting to a lead frame from said source contact area on said MOSFET power device; and	The Accused '567 Patent Methods include the step of determining a total number of lead wires for connecting to the at least one lead frame from a given source contact area. *See, e.g.*, FAIR0008500 (see above diagram, disclosing that FDS6675 has 12 lead wires "H" connecting to the lead frame).
(b) configuring said gate runners for dividing said source contact area into several sub-contact areas with a set of area proportional ratios for disposing several of said lead wires in each of said sub-	The Accused '567 Patent Methods include the step of dividing the source contact area with the one or more gate runners into two or more subsections. The subsections of the source contact area are divided so that they are of proportional ratios for disposing the lead wires in accordance with the ratios. *See, e.g.*, FAIR0008500 (see above diagram, disclosing that FDS6675 has a source contact area

contact areas according to said set of area proportional ratios.	"K" divided by gate runners "L" into 4 proportional sub-contact areas "N." One-fourth of the total number of lead wires "H" is disposed into each sub-contact area "N").

EXHIBIT C

AOS Products Practicing Claim 7 of the '567 Patent (by Part Number)

AO4407
AO4407L
AO4409
AO4409L
AO4410
AO4411
AO4411L
AO4413
AO4413L
AO4415
AO4415L
AO4417
AO4418A
AO4418
AO4418L
AO4421
AO4421L
AO4422A
AO4422AL
AO4422
AO4422L
AO4423
AO4423L
AO4428
AO4429
AO4429L
AO4430
AO4430A
AO4430L
AO4431
AO4436
AO4438
AO4438L
AO4439
AO4439L
AO4446
AO4447
AO4449
AO44451
AO4556
AO4456
AO4462
AO4468
AO4470
AO4472
AO4474
AO4476
AO4702
AO4702L
AO4703
AO4705
AO4706
AO4707
AO4708
AO4709
AO4716
AO4718
AO4726
AO4818B
AO4818
AO4818L
AO4822
AO4822A
AO4822AL
AO4822L
AO4824L
AO4912
AO4912L
AO4916A
AO4916
AO4916L
AO4918A
AO4918AL
AO4918
AO4918L
AO4930
AO4932
AO4938
AOD402
AOD402L
AOU405L

EXHIBIT 3

US005907776A

United States Patent [19]

Hshieh et al.

[11] Patent Number: 5,907,776

[45] Date of Patent: May 25, 1999

[54] **METHOD OF FORMING A SEMICONDUCTOR STRUCTURE HAVING REDUCED THRESHOLD VOLTAGE AND HIGH PUNCH-THROUGH TOLERANCE**

[75] Inventors: **Fwu-Iuan Hshieh**, Saratoga; **Koon Chong So**, San Jose, both of Calif.

[73] Assignee: **MagePower Semiconductor Corp.**, San Jose, Calif.

[21] Appl. No.: **08/891,546**

[22] Filed: **Jul. 11, 1997**

[51] **Int. Cl.**[6] **H01L 21/336**

[52] **U.S. Cl.** **438/270**; 438/273; 438/589

[58] **Field of Search** 438/268, 269, 438/270, 271, 272, 589, 273, 274; 148/DIG. 126

[56] **References Cited**

U.S. PATENT DOCUMENTS

4,742,015	5/1988	Ohagen	438/237
5,135,880	8/1992	Fisher et al.	438/268
5,248,627	9/1993	Williams	438/268
5,527,720	6/1996	Goodyear et al.	438/270
5,567,634	10/1996	Hébert et al.	438/270
5,648,288	7/1997	Williams et al.	438/217

Primary Examiner—Michael Trinh

Attorney, Agent, or Firm—Kam T. Tam

[57] **ABSTRACT**

A power MOSFET (Metal Oxide Semiconductor Field Effect Transistor) device formed on a semiconductor substrate having a body region of a first conductivity type diffused in a semiconductor substrate with an epitaxial layer of a second conductivity type. There is also a source region of a second conductivity type formed in the body region. A portion of the body region adjacent to the source region is compensated by ion implanting a material of the second conductivity type in the portion of the body region such that the impurity concentration of the body region at the portion is reduced. As a consequence, with reduced impurity charge in the body region adjacent to the source, the threshold voltage of the MOSFET device is lowered but at no comprise in punch-through tolerance because the reduction in charge is remote from the origin of the depletion layer which is located at the boundary between the body region and the epitaxial layer.

29 Claims, 6 Drawing Sheets

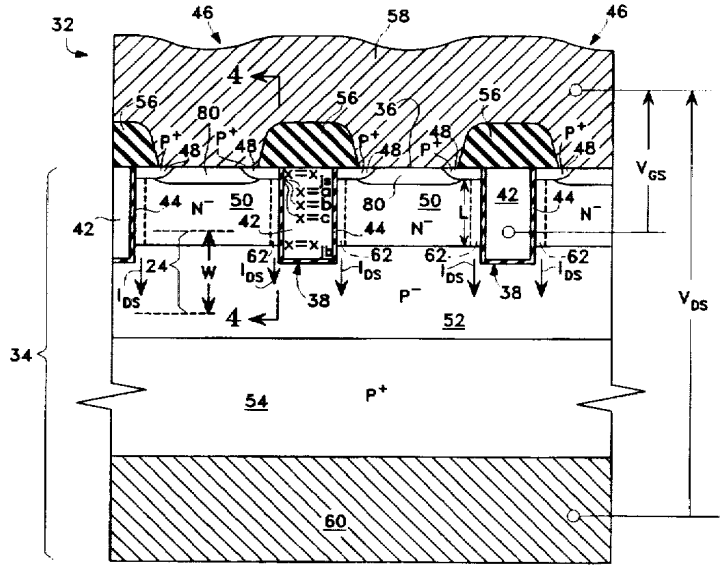

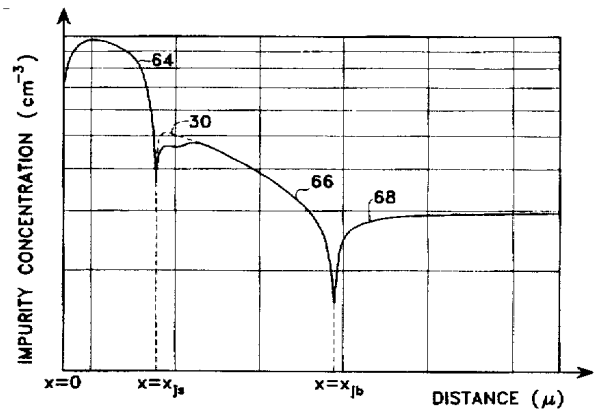

Fig. 1
(PRIOR ART)

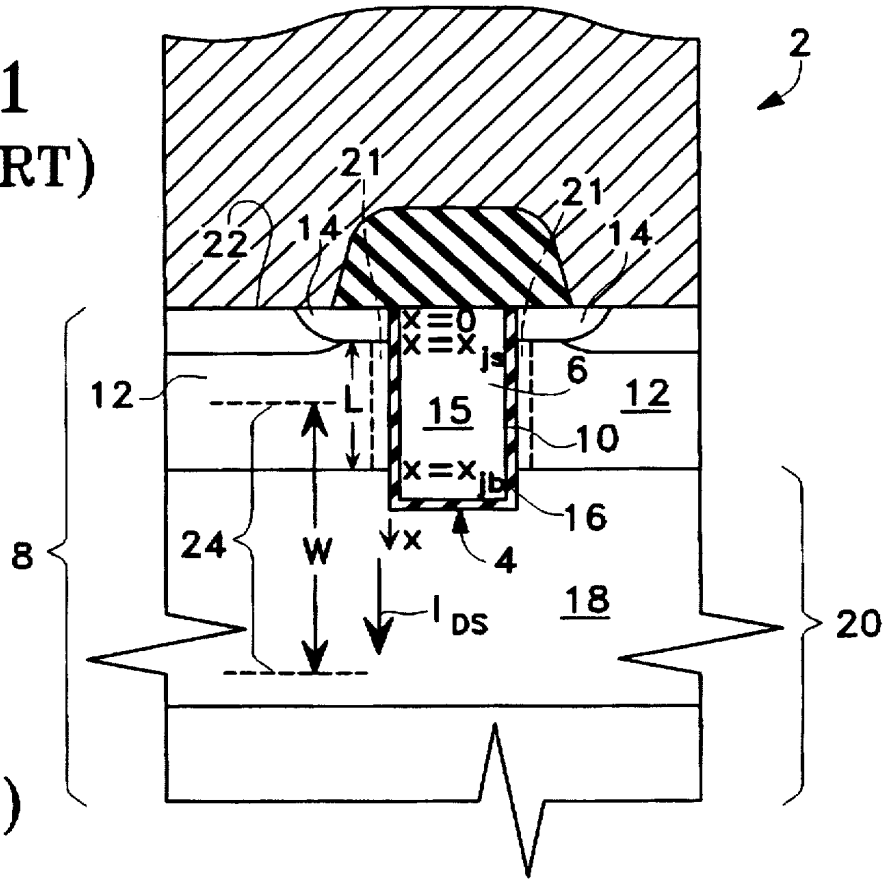

Fig. 2
(PRIOR ART)

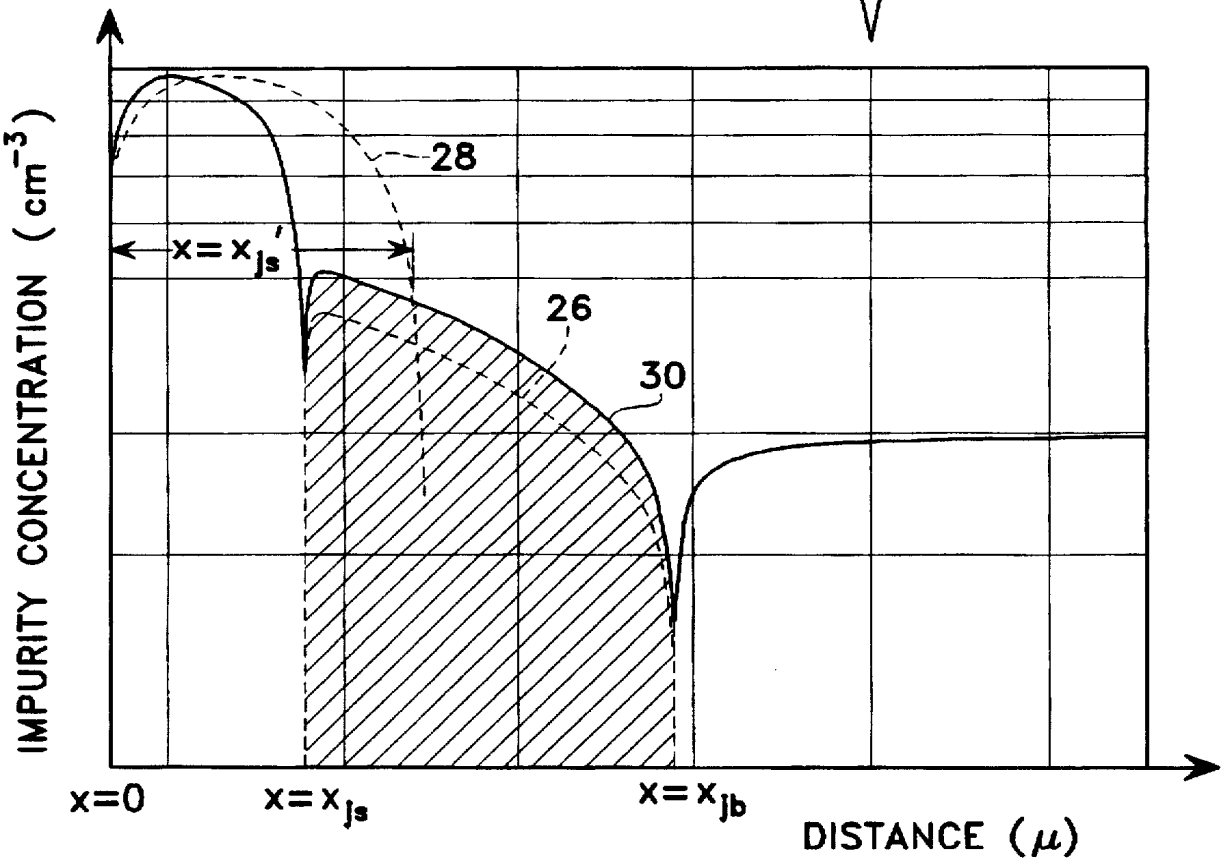

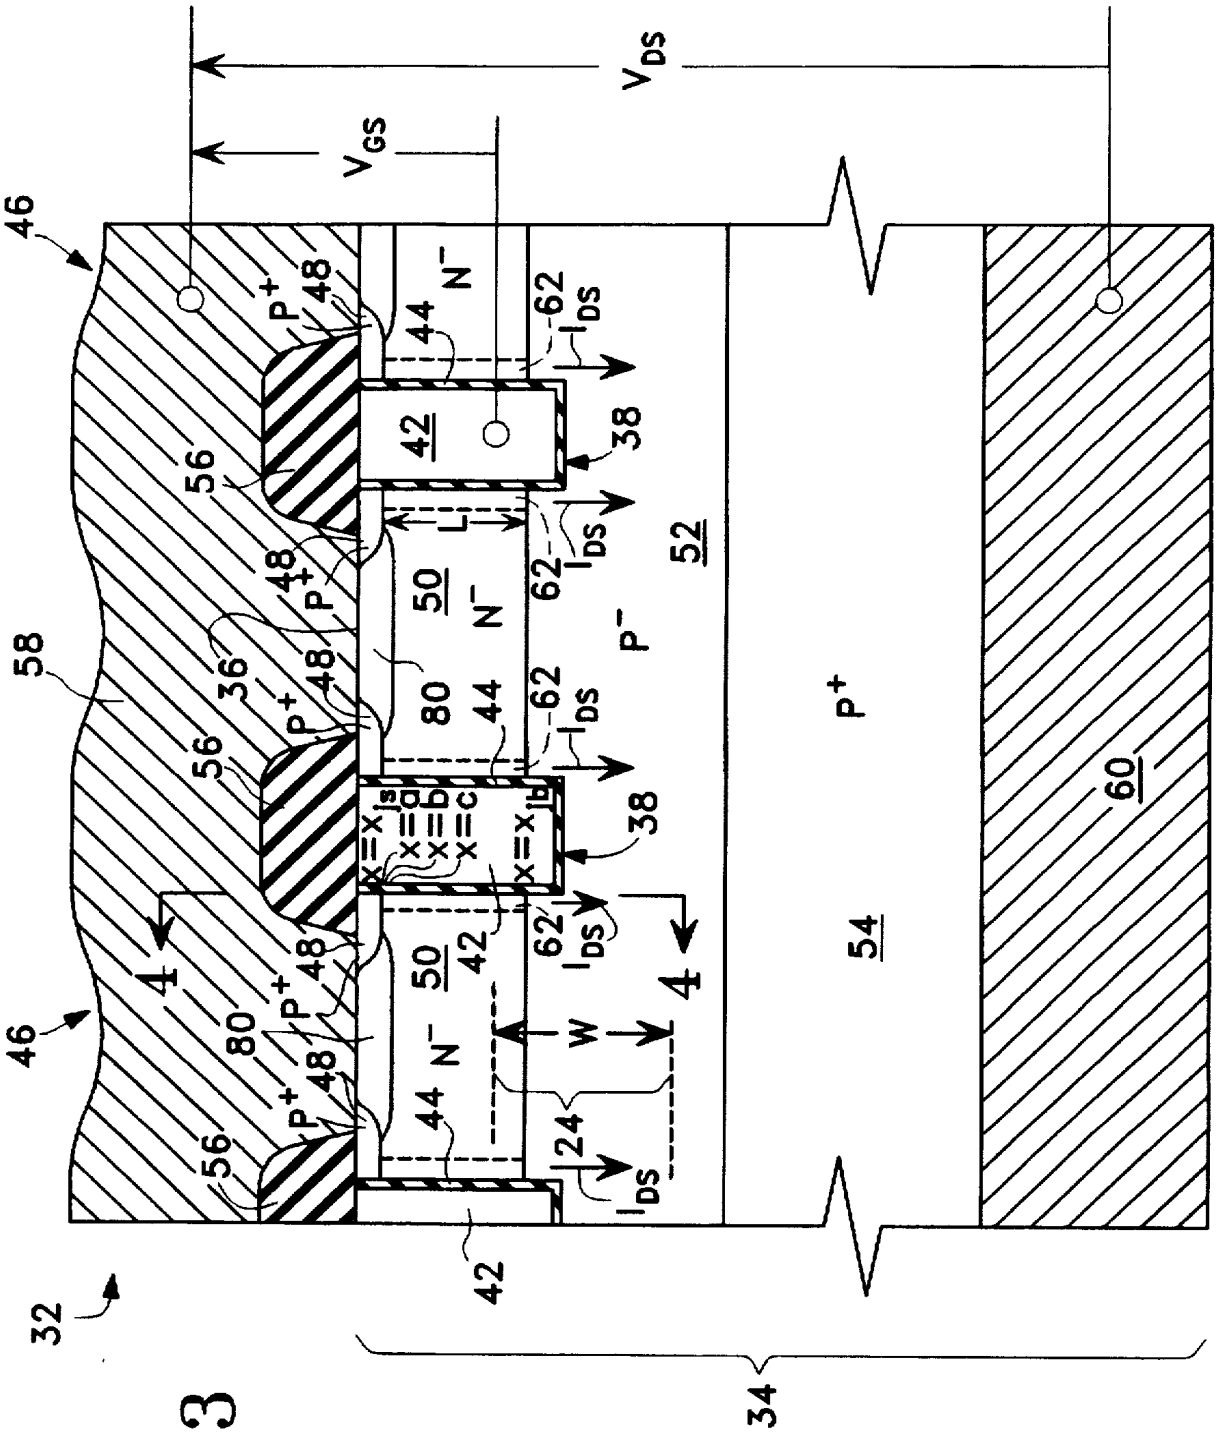
V_{DS}
V_{GS}
46
P^+
48
N^-
44
62
I_{DS}
42
38
56
L
50
52
P^-
P^+
58
36
80
$x=x_s$
$x=a$
$x=b$
$x=c$
$x=x_d$
4
W
24
54
60
32
34

Fig. 3

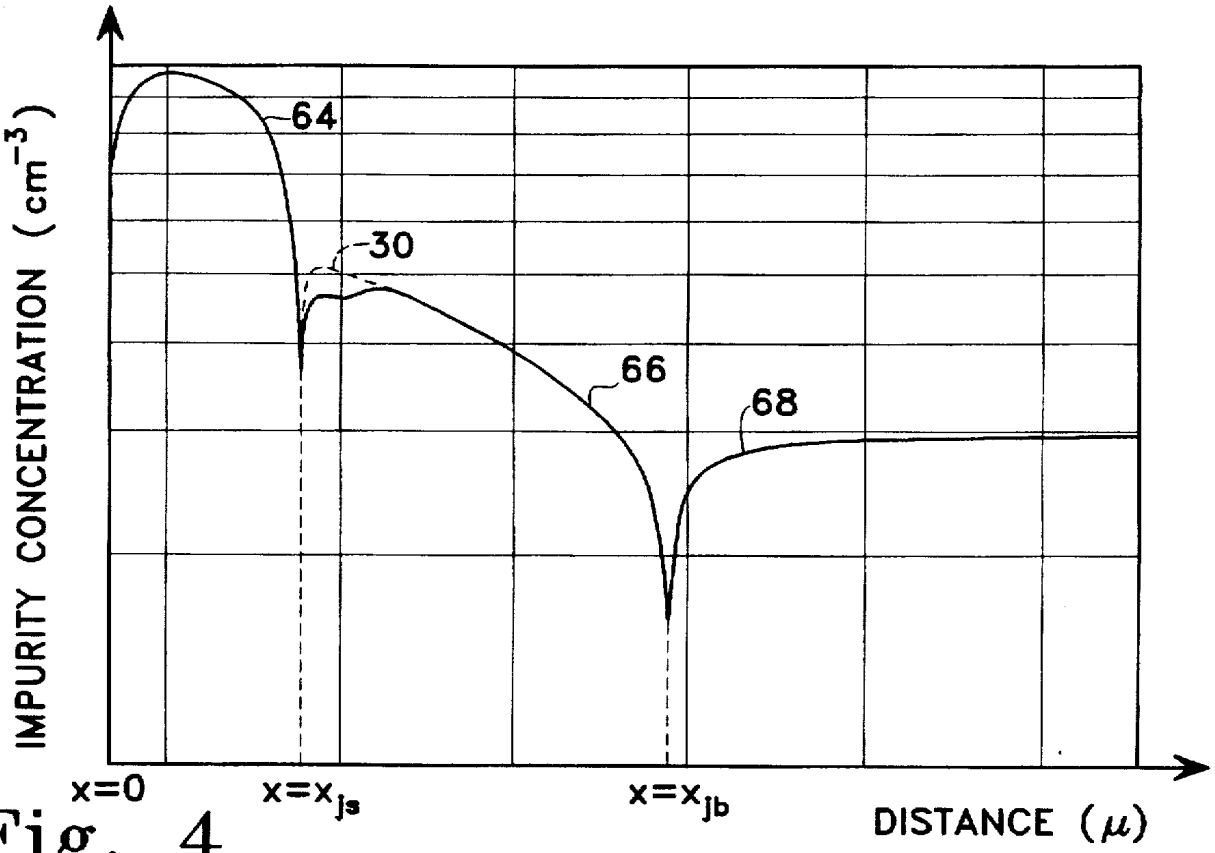
IMPURITY CONCENTRATION (cm^{-3})
64
30
66
68
x=0
$x=x_{js}$
$x=x_{jb}$
DISTANCE (μ)

Fig. 4

Fig. 5

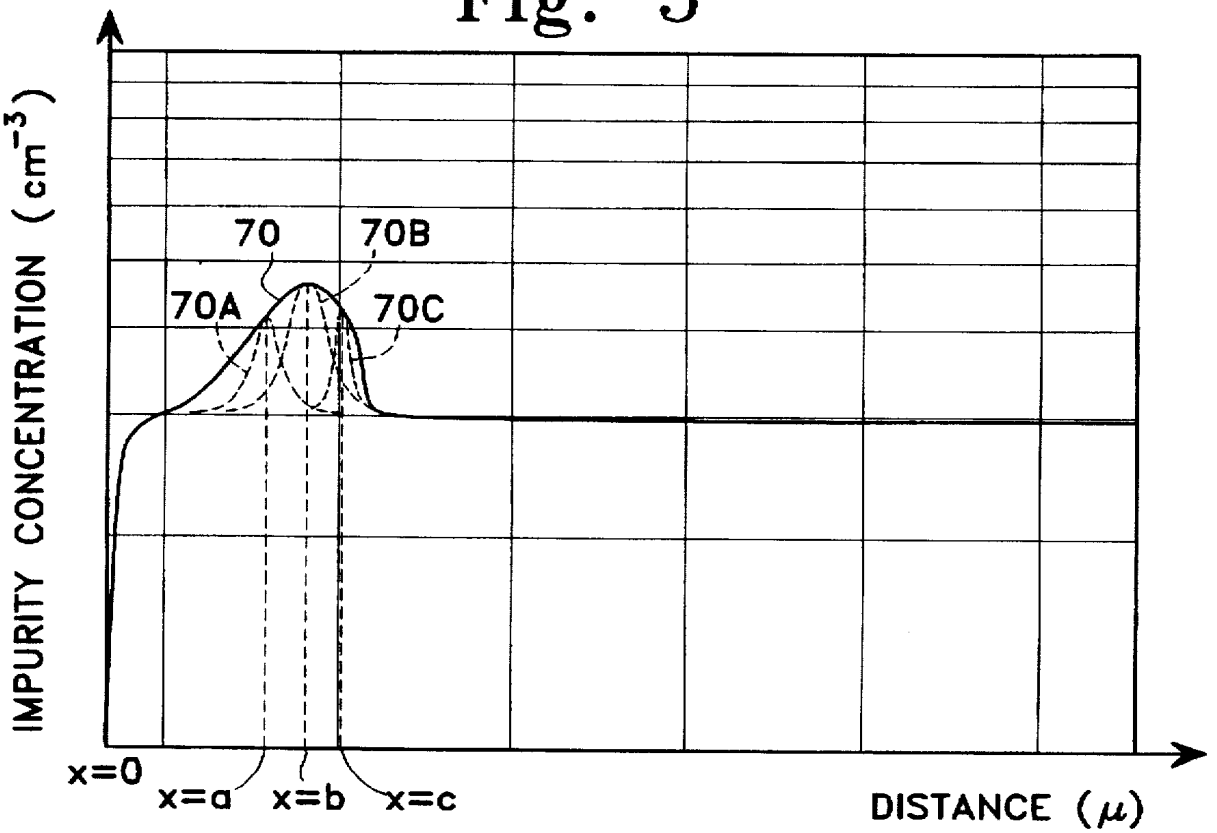
IMPURITY CONCENTRATION (cm^{-3})
70
70B
70A
70C
x=0
x=a
x=b
x=c
DISTANCE (μ)

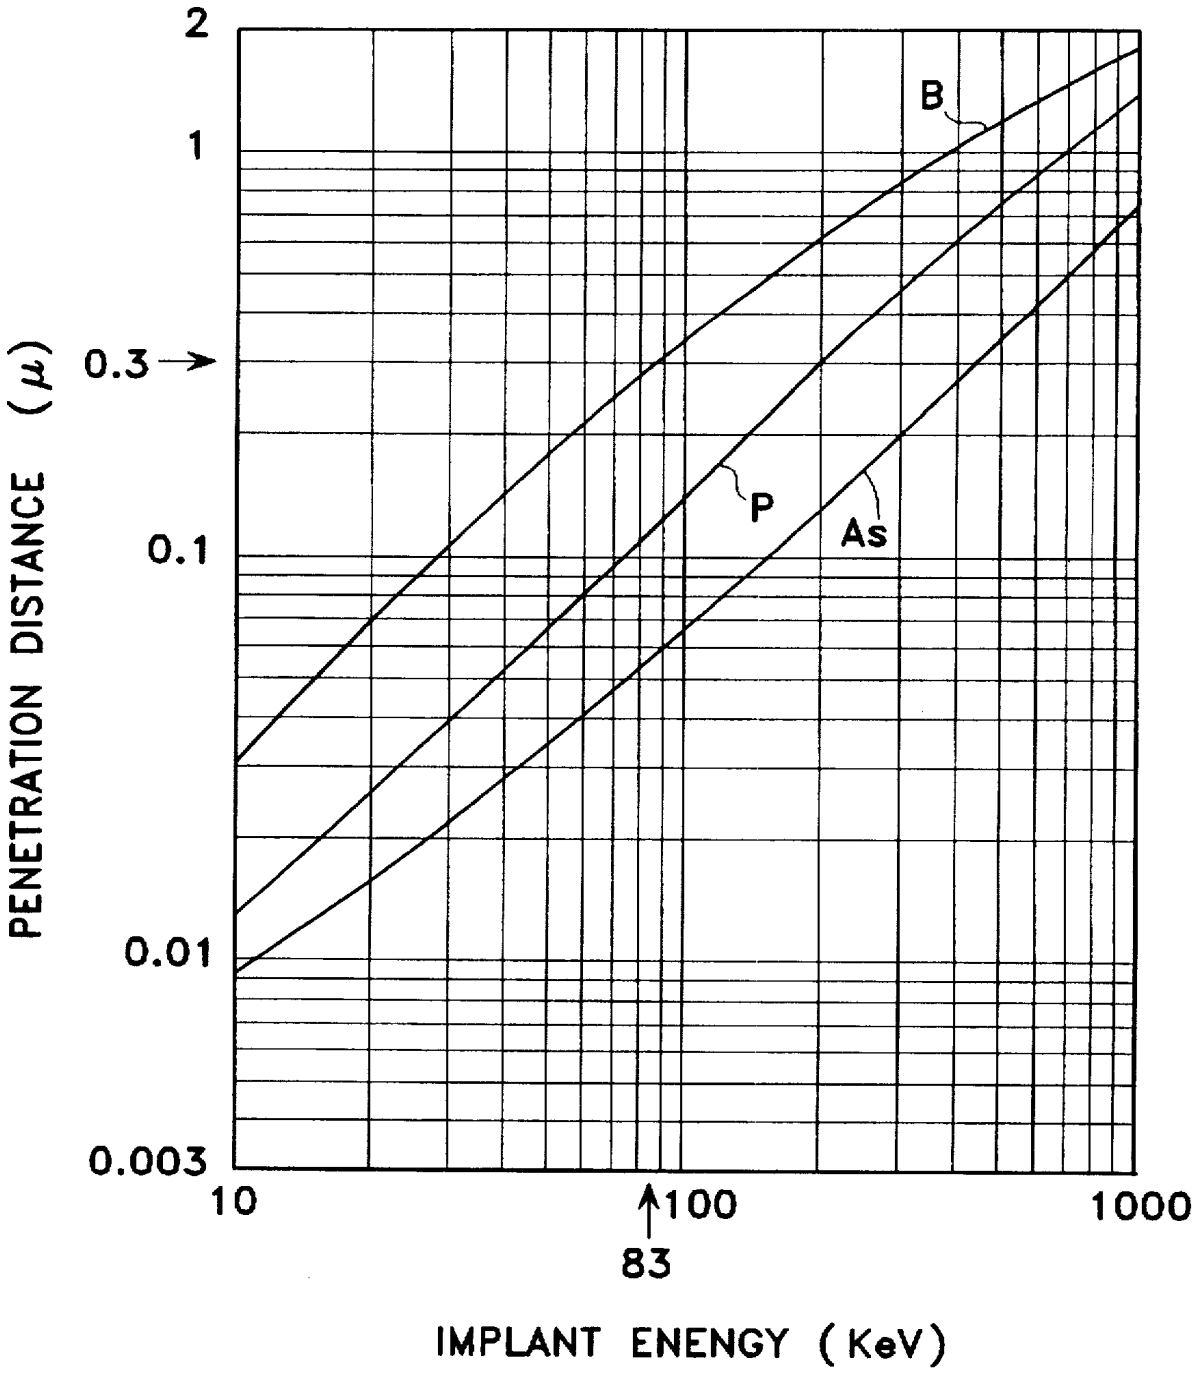
2
1
0.3
0.1
0.01
0.003
PENETRATION DISTANCE (μ)
B
P
As
10
100
1000
83
IMPLANT ENENGY (KeV)

Fig. 6



Fig. 7A

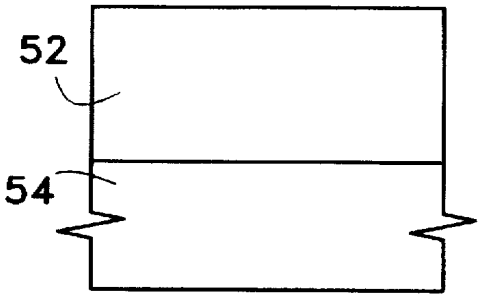

Fig. 7B

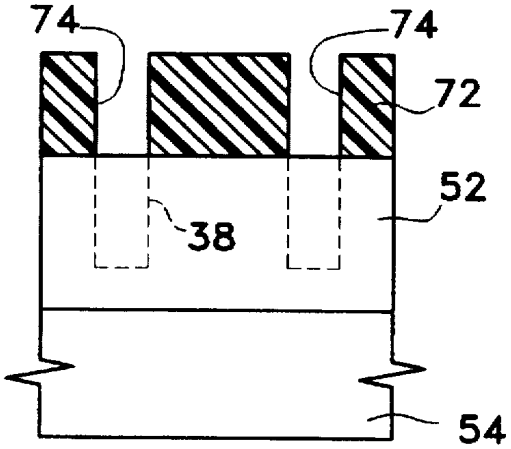

Fig. 7C

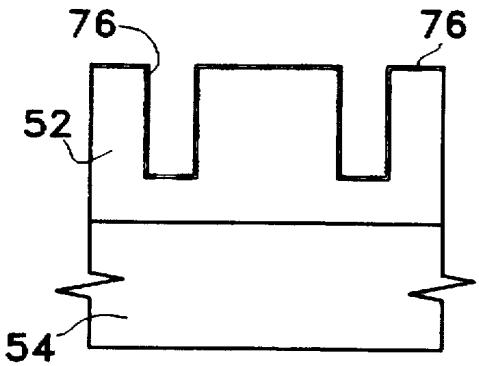

Fig. 7D

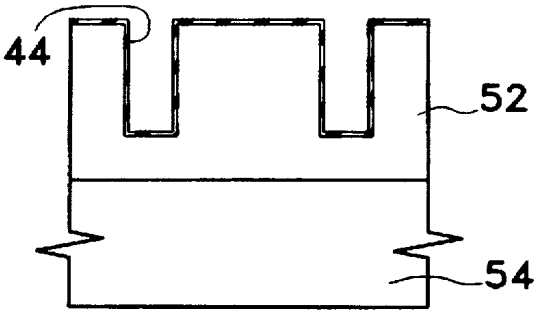

Fig. 7E

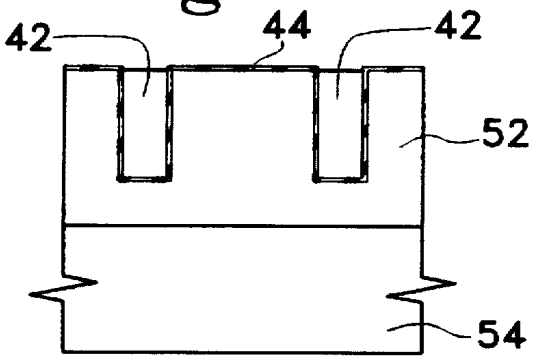

Fig. 7F

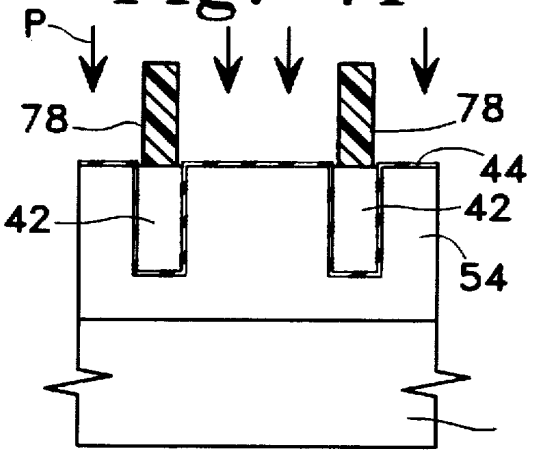

Fig. 7G

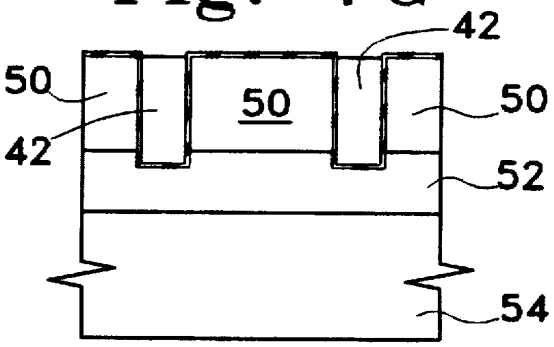

Fig. 7H

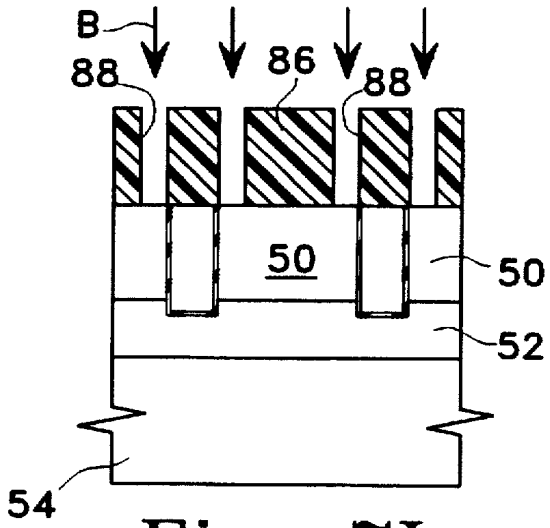

Fig. 7I

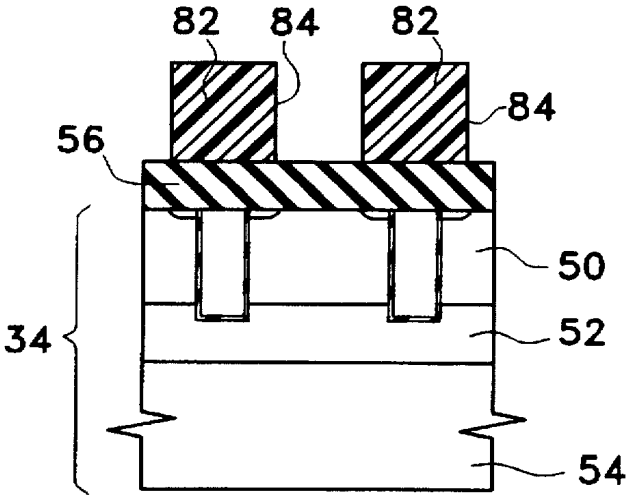

Fig. 7L

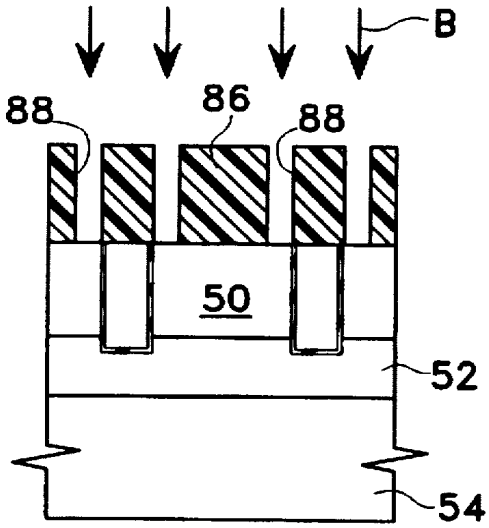

Fig. 7J

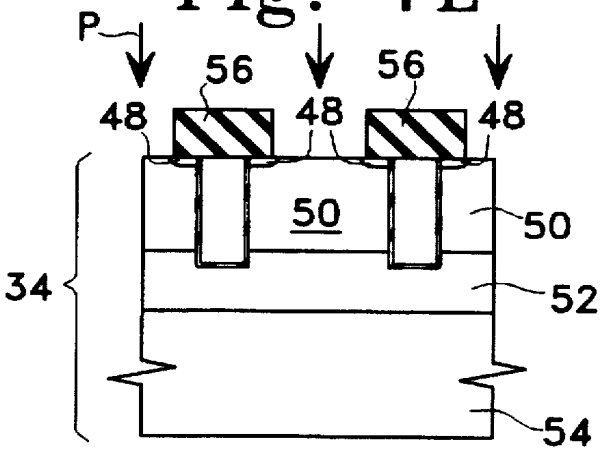

Fig. 7M

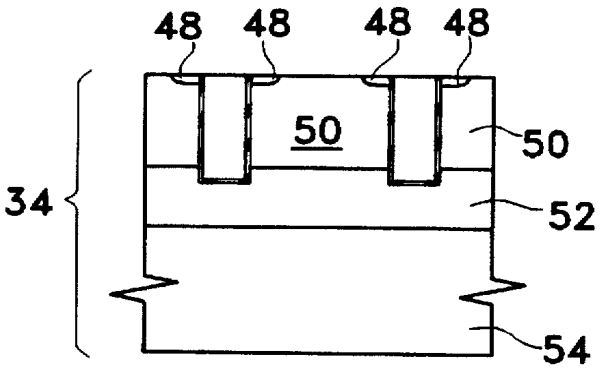

Fig. 7K

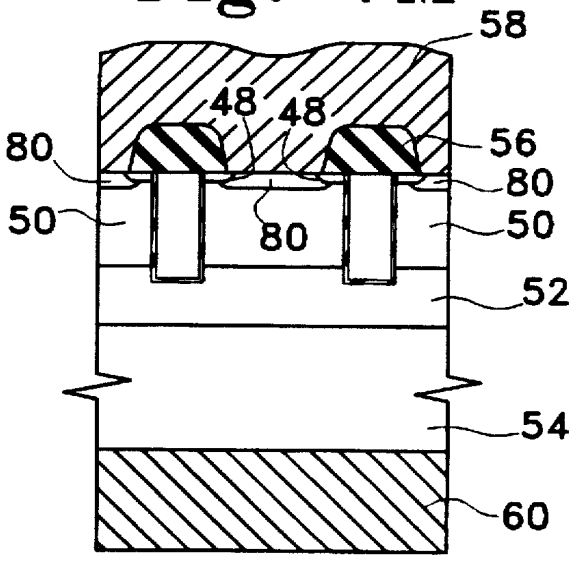

Fig. 7N

METHOD OF FORMING A SEMICONDUCTOR STRUCTURE HAVING REDUCED THRESHOLD VOLTAGE AND HIGH PUNCH-THROUGH TOLERANCE

BACKGROUND OF THE INVENTION

1 . Field of the Invention

The present invention relates generally to microelectronic circuits, and more particularly, to MOSFET (Metal Oxide Semiconductor Field Effect Transistor) power devices having reduced threshold voltage and high punch-through tolerance formed by the process of impurity concentration compensation.

2. Description of the Related Art

Power semiconductor devices have long been used as replacement for mechanical relays in various applications. Modern day instruments, now built at a miniaturized scale with lower power consumption, require power devices to operate under certain stringent requirements. For instance, in a hand-held cellular telephone or a laptop computer, it is common practice to reduce the main power supply level in order to preserve battery life. Accordingly, power devices suitable to be used in these instruments must be capable of operating under reduced power levels and with low turn-on resistance.

Metal oxide semiconductor field effect transistor (MOSFET) devices using trench gates provide low turn-on resistance and are often used for low power applications. In a trench MOSFET device, the channels are arranged in a vertical manner, instead of horizontally as in most planar configurations. The consequential benefit is the realization of a higher degree of integration on a semiconductor substrate. Furthermore, since the channel directions are vertical, the lateral current paths are basically eliminated. That is, each MOSFET cell assumes its own current path and there are no more shared current paths among cells. Stated differently, the vertical arrangement of the cell channels eliminates a dominant component of the turn-on resistance R_{ON}, called the junction resistance R_j, in each MOSFET cell inherently built in a planar configuration. The junction resistance R_j originates from the shared current paths among cells in a planar MOSFET device. The shared current paths essentially act as current bottle necks impeding the flow of channel current I_{DS} and are key contributors to the turn-on resistance R_{ON}. Elimination of the junction resistance R_j results in reduction in the turn on channel resistance R_{ON} and consequently curtails ohmic loss during the power-on state of the MOSFET. Lower ohmic loss provides lower power consumption and further alleviates heat dissipation.

FIG. **1** shows a cross-sectional view of a conventional trenched gate MOSFET device having a cell signified by the reference numeral **2**. The MOSFET cell **2** includes a trench **4** filled with conductive material **6** separated from the silicon substrate **8** with a thin layer of insulating material **10**. There are also other diffusion layers of different impurity types and concentrations deposited in the semiconductor substrate **8**. For examples, a source layer **14** is deposited in the body layer **12**, which in turn is diffused in an expitaxial layer **18**. As arranged, the conductive and insulating materials **6** and **10** in the trench **4** form the gate and gate oxide layer **16**, respectively, of the MOSFET. In addition, the depth L measured from the source **14** to the epitaxial layer **18** constitutes the channel length L of the MOSFET cell **2**. The epitaxial layer **18** is a part of the drain **20** of the MOSFET cell **2**.

When a potential difference is applied across the source **14** and the gate **15**, charges are capacitively induced in the body region adjacent to the gate oxide layer **16**. The induced charges in essence is an inversion layer and is called the channel **21** of the MOSFET cell **2**. When another potential difference is applied across the source **14** and the drain **20**, a drain-to-source current I_{DS} starts to flow from the source **14** to the drain **20** and the MOSFET **2** is said to be at the power-on state.

The conventional trenched MOSFET devices described above have an inherent high threshold voltage V_{th}, which is normally barely below the main power supply level required in a low power application. For example, in a low power instrument, the power supply V_{cc} is commonly set at 3 Volts, while the threshold voltage V_{th} of the MOSFET **2** sits at approximately 2.5 Volts. A turn-on voltage of 3 Volts applied to the gate **15** can hardly turn on the MOSFET device **2**. If the power supply is from a battery source, which drops in power supply V_{cc} level as time progresses, the MOSFET device **2** may never be turned on thereafter. Clearly, the conventional MOSFET **2** is not suitable to be used in applications with reduced V_{cc} levels. Thus, for the power device to function properly under reduced power supply conditions, the threshold level V_{th} of the MOSFET **2** has to be correspondingly reduced. Heretofore, various approaches have been attempted to reduce the threshold level of the MOSFET **2** but have not been proved successful.

Referring to FIG. **1**, the threshold voltage V_{th} is defined as the minimal potential difference between the gate **15** and the source **14** required to barely induce the channel **21** in the body layer **12**. The threshold voltage V_{th} is dependent upon a variety of factors including, inter alia, the thickness of the gate oxide **16**, and the impurity concentration of the body region **12**. The gate oxide thickness and the impurity concentration of the body region are more accessible parameters for adjustment, in contrast with other parameters such as the work functions or the Fermi levels of the basic materials of the MOSFET **2**, which parameters require higher degree of difficulty to manipulate. A precise mathematical expression for the threshold voltage V_{th} can be found in a publication by Wolf et al., "Silicon Processing for the VLSI Era", Lattice Press, IEEE Transactions on Electron Devices, Vol. 2, page 301.

Very often, the thickness of the gate oxide **16** is reduced to lower the threshold voltage V_{th}. However, the drawback with this approach is that making the gate oxide thickness thinner seriously undercut the final production yield and furthermore the reliability of the MOSFET. As is shown in FIG. **1**, the thinner the gate oxide layer **16**, the higher the probability of the conductive material **6** short-circuiting the other layers in the semiconductor substrate **8** through oxide defect in the gate oxide layer **16**.

The second approach to reduce the threshold voltage V_{th} is to lower the impurity concentration of the body layer **12**. However, results of this approach is also fraught with various problems.

FIG. **2** shows the diffusion profile of the MOSFET cell **2**. The abscissa axis of FIG. **2** represents the distance measured from the planar surface **22** toward the substrate **8** (FIG. **1**). The ordinate axis of FIG. **2** corresponds to the impurity concentration of the various layers in absolute value. For example, the source layer **14** is located at a distance of $x=x_{js}$ from the planar surface **22**. Similarly, the body layer **12** is positioned at a distance from $x=x_{js}$ to $x=_{jb}$.

During normal operation, the drain **20** and the body layer **12** are reversely biased. Consequently, a depletion layer is formed characterized by a depletion region **24** with a depletion width W as shown in FIG. **1**, in which the depletion

layer **24** is partly shown in hidden lines. As is well known in the art, the lighter the impurity concentration of a layer, the wider is the depletion width W extending into that layer. Referring back to FIG. **1**, if the body layer **12** is too lightly doped, the depletion layer **24** may encroach into the source layer **14** resulting in an undesirable effect called "punch-through". During punch-through, breakdown ensures in which drain-to-source current I_{DS} flows directly from the source **14** to the drain **20** without passing through the channel **21**. Specifically, as shown in FIG. **2**, the hatched area underneath the impurity curve from $x=x_{js}$ to $x=x_{jb}$ corresponds to the total charge stored in the body layer **12**. The threshold voltage V_{th} of the MOSFET cell **2** can be lowered by reducing the impurity concentration of the body region **12**, as is graphically shown by the lowered curve **26** shown in hidden line in FIG. **2**. It should be noted that the ordinate axis of FIG. **2** is in logarithm scale. A slight shift in the curve **26** corresponds to a substantial change in total charge. The lowering of the impurity concentration in the body layer **12** entails the widening of the depletion layer **24** and increases the possibility of the MOSFET **2** running into punch-through as described above.

There have also been attempts to diffuse the source region **14** to a deeper depth, as shown in FIG. **2** by another hidden line curve **28** intersecting with the original body diffusion curve **30** to form a new source junction at $x=x_{js}$. The purpose is to reduce the total charge stored in the body layer **12**. However, the encroachment problem of the depletion region **24** remains more or less the same because this time, the depletion layer **24** needs only to travel a shorter distance to reach punch-through.

Portable instruments and hand-held electronic products operated by batteries are now in high demand. These instruments and products are all operated by batteries with limited battery lives, at least until the next battery recharges. To preserve battery power and to ensure reliability, there has been a long-felt and increasing need to provide power devices capable of operating under reduced power levels and with low turn-on resistances, yet with robustness in punch-through tolerance.

SUMMARY OF THE INVENTION

It is accordingly the object of the invention to provide a power semiconductor device with low threshold voltage capable of operating at low power supply levels and low turn-on resistance, yet without any compromise in punch-through tolerance. The objective of providing such features in the power semiconductor device at low manufacturing cost is also sought.

The power MOSFET device of the invention is formed on a semiconductor substrate having a body region of a first conductivity type diffused in a semiconductor substrate with an epitaxial layer of a second conductivity type. There is also a source region of a second conductivity type formed in the body region. A predetermined portion of the body region adjacent to the source region is compensated in impurity concentration by ion implanting a material of the second conductivity type into the body region. As a consequence, with reduced impurity charge in the body region at the predetermined position, the threshold voltage of the MOSFET device is reduced. However, the punch-through tolerance of the MOSFET device is not affected because the reduction in charge is remote from the origin of the depletion layer which is located at the boundary between the body region and the epitaxial layer. The compensation process requires no special tooling and the increase in manufacturing costs is insignificant.

As will be explained later in this specification, a MOSFET device formed in accordance with the invention allows additional leeway to shorten the channel length, enabling the MOSFET device to be built with further lower power-on resistance. It also needs to be mentioned that with lower threshold voltage, it takes a shorter rise time to reach the lower threshold voltage level to turn on the device, thereby ensuring faster switching rate for the MOSFET cell.

These and other features and advantages of the invention will be apparent to those skilled in the art from the following detailed description, taken together with the accompanying drawings, in which like reference numerals refer to like parts.

DESCRIPTION OF THE DRAWINGS

FIG. **1**, as described above, is a cross-sectional view of a conventional MOSFET device showing the various diffusion layers;

FIG. **2**, as described above, is a diffusion profile of the MOSFET device of FIG. **1** illustrating the impurity concentration of the various layers;

FIG. **3** is a cross-sectional view of the preferred embodiment of the invention;

FIG. **4** is a diffusion profile of the MOSFET device of FIG. **3** illustrating the impurity concentration of the various layers;

FIG. **5** is a diffusion profile highlighting only the impurity concentration of the compensation dopant impinging upon the body layer;

FIG. **6** is a graphical representation illustrating the relationship between the penetration distance and the required implant energy; and

FIGS. **7A–7N** are sequential views illustrating the process of making the MOSFET device of the invention.

DETAILED DESCRIPTION OF THE INVENTION

Reference is now made to FIG. **3** which shows the cross-sectional view of the preferred embodiment of the invention. The semiconductor structure of the invention is generally signified by the reference numeral **32** which includes a substrate **34** having a planar surface **36**. Formed in the substrate **34** is a plurality of trenches **38** filled with conductive material **42** which is electrically separated from the substrate **34** by thin insulating layers **44**. In the preferred embodiment, the materials for the substrate **34**, conductive material **42** and the insulating layers **44** are respectively crystalline silicon (Si), polycrystalline silicon (Si), and silicon dioxide (SiO_2). Each cell **46** is a P-channel MOSFET which comprises a source layer **48** made of P-type material, a body layer **50** formed of N-type material, an epitaxial layer **52** made of a lightly doped P-type material, and a drain layer **54** based on a heavily doped P-type material. Atop the trenches **38** are passivation layers **56** insulating the conductive material **42** from a source contact metal layer **58**. The source contact metal layer **58** is disposed in contact with the substrate **34** via contact regions **80**. There is also a drain metal contact layer **60** attached to the drain **54** of the MOSFET **32**. The conductive material **42** in the each trenched gate **38** is electrically connected but is not shown in FIG. **3**.

When a potential difference V_{GS} exceeding the threshold voltage V_{th} is applied across the source layer **48** and the trenched gates **42** through the respective metal contact layer **58** and the gate contact (not shown), an N-type inversion

layer **62** is capacitively induced in the P-type body layer **50**. The inversion layer **62** is called the channel of the MOSFET cell **46**. The highly conductive channel **62** allows a channel current I_{DS} to flow from the source **48** to the drain **54** when another potential difference V_{DS} is applied across the source **48** and the drain **54** through the respective metal contact layers **58** and **60**.

It should be noted that in contrast with the prior art structure **2** as described above, and shown in FIG. **1** the channel length L can be built at a shorter dimension because there is no comprise in impurity concentration in the bulk of the body region **50**, as is herein explained.

Shown in FIG. **4** is the diffusion profile taken along the cross-sectional line **4—4** of FIG. **3**. The ordinate axis of FIG. **4** corresponds to the impurity concentration of the various layers in absolute value of the semiconductor structure **32**. For example, the impurity concentrations of the source region **48**, the body region **50** and the expitaxial region **52** are represented by the curves **64**, **66** and **68**, respectively. The source layer **48** is located at a distance of $x=x_{js}$ from the planar surface **36** (x=0). Similarly, the body layer **50** is positioned at a distance from $x=x_{js}$ to $x=x_{jb}$. It should be noted that in FIG. **4**, the excess impurity concentration for the body diffusion curve **66** adjacent to the source boundary $x=x_{js}$ is truncated. In contrast, the conventional body diffusion curve represented by the curve **30** shown in hidden lines in which the excess charge is clearly eminent. The leveling of the impurity profile for the body diffusion curve **66** adjacent to the source boundary $x=x_{js}$ serves important functions. First, the threshold voltage V_{th} is substantially reduced because of the reduced impurity concentration near the source boundary $x=x_{js}$ in the body region **50**. It should be emphasized again that even though the charge reduction shown in FIG. **4** appears to be a small proportional reduction in comparison to the total charge stored in the body region **50**, nevertheless, FIG. **4** is illustrated in a logarithm scale and the reduction in impurity charge is in fact a sizable amount. Secondly, the reduction in charge is remote from the body boundary $x=x_{jb}$ where the depletion region **24** originates and extends. Since there is practically no comprise in impurity concentration in the bulk of the body region **50**, the encroachment problem of the depletion layer in not much of a concern. With prudent design, the body diffusion curve **66** can be appropriately truncated such that the threshold voltage V_{th} can be maintained to an acceptable level, yet at the same time, the channel length L can be shortened so as to reduce the drain-to-source resistance R_{DS}.

In the preferred embodiment, the truncated body diffusion curve **66** is accomplished by a series of implantation steps. Shown in FIG. **5** is the resultant impurity concentration profile represented by a compensation curve **70** which in essence is a superimposition of three individual implantation curves **70A–70C**. The penetration distances of the individual implantation x=a, x=b, and x=c are first determined. The process of ion implantation is employed to place various dosages of dopant into the substrate **34**. An exemplary technique for implanting a dopant at a predetermined penetration distance into a silicon substrate can be found in a publication by Wolf et al., "Silicon Processing for the VLSI Era", Lattice Press, IEEE Transactions on Electron Devices, Vol. 1, pages 285–291.

FIG. **6** shows a graphical representation of the relationship between the penetration distance and the required energy implantation energy level. For example, in this embodiment, boron (B) is used as the implant material. As an illustration, suppose a distance of 0.3 μ of penetration distance beyond the planar surface **36** (FIG. **3**) is intended. Once the desired penetration distance 0.3 μ is located at the ordinate axis of FIG. **6**, the corresponding value on the abscissa axis can be extracted. As shown in FIG. **6**, the required energy level for the implanting boron is 83 KeV. In a similar manner, positioning implant materials at other penetration distances can likewise be determined. The process of fabricating the semiconductor structure **32** with the aforementioned compensation will be described in more detail hereinafter. It should be noted that in the preferred embodiment, the compensation material is P-type material such as boron which requires less implant energy as compared to other N-type counterparts such as phosphorous or arsenic, as is shown in FIG. **6**.

FIGS. **7A–7M** are sequential views showing the process making the MOSFET device of the invention. In the preferred method, the fabrication process starts with providing a P-type base silicon wafer **54** with a <0.0.1> crystal orientation and a resistivity of between 0.01 Ω-cm=0.02 Ω-cm, for example, as shown in FIG. **7A**. An epitaxial layer **52** with a resistivity of approximately between 0.1 Ω-cm= 5.0 Ω-cm is then grown atop the base wafer **52** to a thickness of approximately 3 to 20 μm. The resultant structure up to this step is shown in FIG. **7B**.

A photoresist layer **72** is then spunned atop the epitaxial layer **52**. Conventional techniques of masking and etching are employed to selectively open windows **74** in the photoresist layer **72**. Using the photoresist **72** as a shielding mask, the structure is then subjected to the standard technique of dry anisotropic etching by exposing the structure to a plasma (not shown) for the formation of the trenches **38** as shown in FIG. **7C**.

What follows is the step of forming gate oxide layers by lining the trenches **38** with insulating material. First, the trenches **38** has to undergo a sacrificial oxidation process. Basically, the structure is exposed to oxidation agent of either oxygen (O_2), if the dry method is employed, or steam (H_2O), if the wet method is preferred, under an ambient temperature of approximately between 90° C.–1,100° C. The grown sacrificial oxide layer **76** is then lightly etched away for the purpose of securing a smooth silicon surface as a prelude for subsequent gate oxide growth. The method of wet etch can be applied for the removal of the sacrificial oxide layer **76**. The finished structure up to this step is shown in FIG. **7D**.

The step of gate oxide growth is then carried out by exposing the structure to either dry or wet agents as described above, under an ambient temperature of between 800° C.–1,100° C. to a thickness of approximately 200 Å–1000 Å. The finished structure with a grown gate oxide layer **44** is shown in FIG. **7E**.

The trenches **38** need to be filled with conductive material. In the preferred method, the trenches **38** are filled with polycrystalline silicon **42** by the conventional method of chemical vapor deposition (CVD). The step of either mechanical or chemical planarization then follows. The remaining polycrystalline silicon **42** is then doped with phosphorus oxychloride ($POCl_3$) to a sheet resistivity of approximately 20–40 Ω/□ under an ambient temperature of about 950° C. The remaining polycrystalline silicon **42** is further chemically etched until the surface is barely below the oxide layer **44** as shown in FIG. **7F**.

It should be noted that the polycrystalline silicon **42** is preferably doped to a N-type conductivity. As is known in the art, the charge carries for N-type material are electrons which have higher mobility than the P-type material counterparts which are holes. Thus, use of N-type polycrystalline

silicon **42** can provide faster turn-on or turn-off time for the MOSFET device. The main reason stems from the reduction in the resistance component of the RC time constant, where R is the distributed resistance and C is the distributed capacitance of any signal propagation path. However, doping the polycrystalline gate to N-type in a P-channel MOSFET device always results in a high threshold voltage, as is the case with most prior art processes. The method of the present invention is especially advantageous under this situation because the threshold level can be reasonably adjusted to any level without disturbing other parameters of the device as explained previously.

Reference is now returned back to FIG. **7**G. Another photoresist mask **78** is patterned above the structure, which is then ion-implanted with phosphorous (P) under an implant potential of approximately 60 KeV–100 KeV at a dosage of about 2×10^{13} cm^{-2} to 2×10^{14} cm^{-2}. It should be noted that the photoresist mask **78** is used mainly for the fabrication of the termination circuits (not shown) and its use for the processing of the MOSFET cell **46** is optional. Without the mask **78**, phosphorous ions can well be implanted into the polycrystalline silicon **42** as it has already been doped heavily with the N-type dopant ($POCl_3$) as described above. The heavily doped N-type dopant overshadows the relatively lightly doped phosphorous in the polycrystalline silicon **42**. The photoresist mask **78**, if used as shown in FIG. **7**G, is then stripped away from the structure which then undergoes a drive-in cycle at a temperature of about 1,000° C.–1,200° C., resulting in a lightly doped N-type body layer **50** driven in the epitaxial layer **52** as shown in FIG. **7**H.

Thereafter the deposition of the source layer **48** follows. First, the remnant surface oxide is removed. Another photoresist mask **86** with source layer windows **88** is then formed on the top of the structure. Boron is then ion-implanted into the masked structure with an implant dosage of approximately 5×10^{15} cm^{-2} to 1×10^{16} cm^{-2} under an implant potential of between 40 KeV to 100 KeV, as shown in FIG. **7**I.

The step of body region compensation is the next step in the fabrication process. Reference is now directed back to FIGS. **3**–**5**. To secure a reasonably level body diffusion curve **66** near the body junction $x=x_{js}$, successive implantations at various distances from the planar surface **36** (FIG. **3**) are preferred. It this method, boron ions are implanted at distances of x=a, x=b and x=c from the planar surface **36** (FIG. **3**), which distances correspond to the individual implant profiles **70**A, **70**B and **70**C, respectively, as shown in FIG. **5**. Profile **70**B can be higher in amplitude and can be coincident with the peak value of the body diffusion curve **66** had the curve **66** not been compensated (that is, the uncompensated curve **30**). Once the distances x=a, x=b and x=c are determined, the corresponding implant energy levels can be extracted from the energy chart as shown in FIG. **6**. Boron is then driven into the structure as shown in FIG. **7**J by the process of ion-implantation in which implant dosages are set by the implant durations.

In the preferred method, the source implant and the compensation implant are subjected to a combined drive-in cycle under a temperature of between 900° C.–1,000° C. for a duration of between 10 minutes to 2 hours. The resultant structure with the deposited source layer **48** and the compensated body region **50** is shown in FIG. **7**K.

After the drive-in cycle, the resultant implant profile is essentially an envelope curve **70** encompassing all the individual profiles **70**A–**70**C. The compensation curve **70** of FIG. **5** when superimposed with the pre-compensated diffusion profile as shown in FIG. **4** results in the body diffusion curve **66** with reduced impurity concentration near the source junction $x=x_{js}$, as compared to the pre-compensated profile **30** where there is no such reduction. As mentioned before, the ordinate axis of FIG. **4** is shown in logarithm scale and the reduction in impurity concentration near the source junction $x=x_{js}$ is in fact a substantial amount. Moreover, the reduction in impurity concentration is remote from the body boundary $x=x_{jb}$ where the depletion region **24** originates and extends. Since there is no comprise in impurity concentration adjacent to the body boundary at $x=x_{jb}$, the encroachment problem of depletion layer **24** into the source region **48** would not be a concern.

Thereafter, the deposition steps of the passivation layer **56** follows. The material for the passivation layer **56** can be phosphosilicate glass (PSG). Afterwards, another photoresist layer **82** is then formed atop the passivation layer **56**. The photoresist layer **82** is then patterned with contact windows **84** as shown in FIG. **7**L.

The passivation layer **56** is etched through the patterned mask **82** using an etchant which significantly attacks the passivation layer **56** but not the patterned photoresist mask **82**. Either the method of dry etch or wet etch can be employed. If the dry etch method is used, the etchant is plasma. If the wet etch method is adopted, the etchant can be HF. Thereafter, the mask **82** is removed, the resultant structure up to this step is shown in FIG. **7**M.

Utilizing the patterned passivation layer **56** as a mask, phosphorous ions are then implanted into the structure as shown in FIG. **7**M. The implanted phosphorous is thereafter driven in the N-type body layer **50** to a slight depth. Consequently, contact regions **80** are formed in the substrate **34** as will be shown in FIG. **7**N.

The passivation layer **56** is then subjected to a densification process under a temperature range of about 900° C.–950° C. for 30 minutes to 60 minutes. After the densification process, the corners of the passivation layer **56** are rounded off. The source and drain metal contact layers **58** and **60** can thereafter be deposited with conventional microelectronic processing techniques and are not further elaborated in here. The eventual structure up to this step is shown in FIG. **7**N.

Finally, other changes are possible within the scope of the invention. The source implantation step shown in FIG. **7**I and the body region compensation implantation step shown in FIG. **7**J can well be reversed. That is, it is perfectly possible to perform the compensation implantation step prior to the source implantation step. Furthermore, the source implant resulted from the implantation step shown in FIG. **7**I, and the compensation implant resulted from the implantation step shown in FIG. **7**J can assume separated drive-in cycles. As mentioned before, the conductivity types of the layers may very well be different from that as depicted in the specification. In the preferred embodiment, the semiconductor structure is a P-channel MOSFET device. The structure can well be built as a N-channel device. Furthermore, the portion of the body region adjacent to the source need not be fully compensated with a dopant of opposite conductivity type. A partially compensated body region can well result in a MOSFET device with a reduced threshold voltage. In addition, the device fabricated in accordance with the invention need not be a power MOSFET. It can well be slightly modified and used for other purposes, such as a dynamic random access memory (DRAM) cell, an insulated gate bipolar transistor (IGBT), or a charge-coupled-device (CCD), to name just a few. It will

be understood by those skilled in the art that these and other changes in form and detail may be made therein without departing from the scope and spirit of the invention.

What is claimed is:

1. A method of forming a semiconductor structure comprising the steps of:

(a) providing a substrate having a major surface;

(b) forming at least one trench in said substrate;

(c) forming a body region of a first conductivity type in said substrate, said body region having a diffusion boundary in said substrate;

(d) forming a source region of a second conductivity type in said body region; and

(e) compensating a portion of said body region by implanting material of said second conductivity type in said body region, said portion being proximal to said source region and spaced from said diffusion boundary of said body region and said major so as to reduce the impurity concentration of said first conductivity type in said portion of said body region.

2. The method of forming a semiconductor structure as set forth in claim 1 further including filling said at least one trench with N-type material.

3. The method of forming a semiconductor structure set forth in claim 1 wherein step (a) includes providing a base substrate of said second conductivity type and forming an epitaxial layer of said second conductivity type above said base substrate.

4. The method of forming a semiconductor structure as set forth in claim 1 wherein step (c) includes the substeps of ion implanting material of said body region in said substrate and thereafter diffusing said material of said body region in said substrate.

5. The method of forming a semiconductor structure as set forth in claim 1 wherein step (d) includes the substeps of ion implanting material of said source region in said substrate and thereafter diffusing said material of said source region in said body region.

6. The method of forming a semiconductor structure as set forth in claim 5 wherein step (e) includes ion implanting material of said second conductivity type in said body region at a predetermined distance from said source region.

7. The method of forming a semiconductor structure as set forth in claim 5 wherein step (e) includes successive substeps of ion implanting material of said second conductivity type in said body region at predetermined distances from said source region.

8. The method of forming a semiconductor structure as set forth in claim 1 wherein step (e) is performed prior to step (d).

9. The method of forming a semiconductor structure as set forth in claim 1 further comprising the step of simultaneously diffusing said source region and said compensated portion of said body region after step (e).

10. The method of forming a semiconductor structure as set forth in claim 1 further comprising forming a gate region formed of material of N-type conductivity dielectrically separated from said body region.

11. The method of forming a semiconductor structure as set forth in claim 1 wherein said first conductivity type is of N-type and said second conductivity is of P-type.

12. The method of forming a semiconductor structure as set forth in claim 1 wherein the implanting material in step (e) is boron.

13. A method of forming a semiconductor structure having a trench gate with a gate threshold voltage, said method comprising the steps of:

(a) providing a substrate having a major surface;

(b) forming a body region of a first conductivity type in said substrate, said body region having a diffusion boundary in said substrate;

(c) forming a source region of a second conductivity type in said body region; and

(d) compensating a portion of said body region by implanting material of said second conductivity type in said body region adjacent to said source region and spaced from said diffusion boundary of said body region and said major surface such that the impurity concentration of said portion of said body region is substantially reduced so as to decrease the gate threshold voltage of said trench gate.

14. The method of forming a semiconductor structure as; set forth in claim 13 wherein step (d) is performed prior to step (c).

15. The method of forming a semiconductor structure as set forth in claim 13 wherein step (d) includes ion implanting material of said second conductivity type in said body region at a predetermined distance from said source region.

16. The method for forming a semiconductor structure as set forth in claim 15 wherein step (d) further including diffusing said compensated portion of said body region in said body region.

17. The method of forming a semiconductor structure as set forth in claim 13 wherein step (d) includes successive substeps of ion implanting material of said second conductivity type in said body region at predetermined distances from said source region.

18. The method of forming a semiconductor structure as; set forth in claim 17 further including the substep of filling said at least one trench with N-type material.

19. The method of forming a semiconductor structure as set forth in claim 18 wherein step (b) includes the substeps of ion implanting material of said body region in said substrate and thereafter diffusing material of said body region in said substrate.

20. The method of forming a semiconductor structure as set forth in claim 19 wherein step (c) includes the substeps of ion implanting material of said source region in said substrate and thereafter diffusing material of said source region in said body region.

21. The method of forming a semiconductor structure as set forth in claim 19 wherein step (d) includes the substep of diffusing the compensated portion of said body region in said body region and wherein the diffusing of said source region and the diffusing of said compensated portion of said body region are performed simultaneously.

22. The method of forming a semiconductor structure as set forth in claim 21 wherein step (a) includes the substeps of providing a base substrate of said second conductivity type and forming an epitaxial layer of said second conductivity type above said base substrate.

23. The method of forming a semiconductor structure as set forth in claim 22 wherein said first conductivity type is of N-type and said second conductivity is of P-type.

24. The method of forming a semiconductor structure as set forth in claim 23 wherein the implanting material in step (d) is boron.

25. A method of forming a semiconductor structure having a gate with a gate threshold voltage, said method comprising the steps of:

(a) providing a substrate having a major surface;

(b) forming at least one trench in said substrate extending from said major surface;

(c) forming a body region of a first conductivity type in said substrate to a diffusion boundary extending from said major surface;

(d) forming a source region of a second conductivity type in said body layer extending from said major surface; and

(e) compensating a portion of said body region by implanting material of said second conductivity type in said body region adjacent to said source region and spaced from said diffusion boundary of said body layer and said major surface such that the conductivity of said portion of said body region is substantially reduced so as to decrease the gate threshold voltage of said gate.

26. The method of forming a semiconductor structure as set forth in claim **25** wherein step (b) includes the substep of lining said trenches with insulating material and followed by another substep of filing said trenches with conductive material.

27. The method of forming a semiconductor structure as set forth in claim **26** wherein said conductive material is a N-type material.

28. The method of forming a semiconductor structure as set forth in claim **25** wherein step (e) includes ion implanting material of said second conductivity type in said body region at a predetermined distance from said source region.

29. The method of forming a semiconductor structure as set forth in claim **25** wherein step (e) includes successive substeps of ion implanting material of said second conductivity type in said body region at predetermined distances from said source region.

* * * * *